


xPole Home

New residential breaker range for protection and safety of your home



Catalog

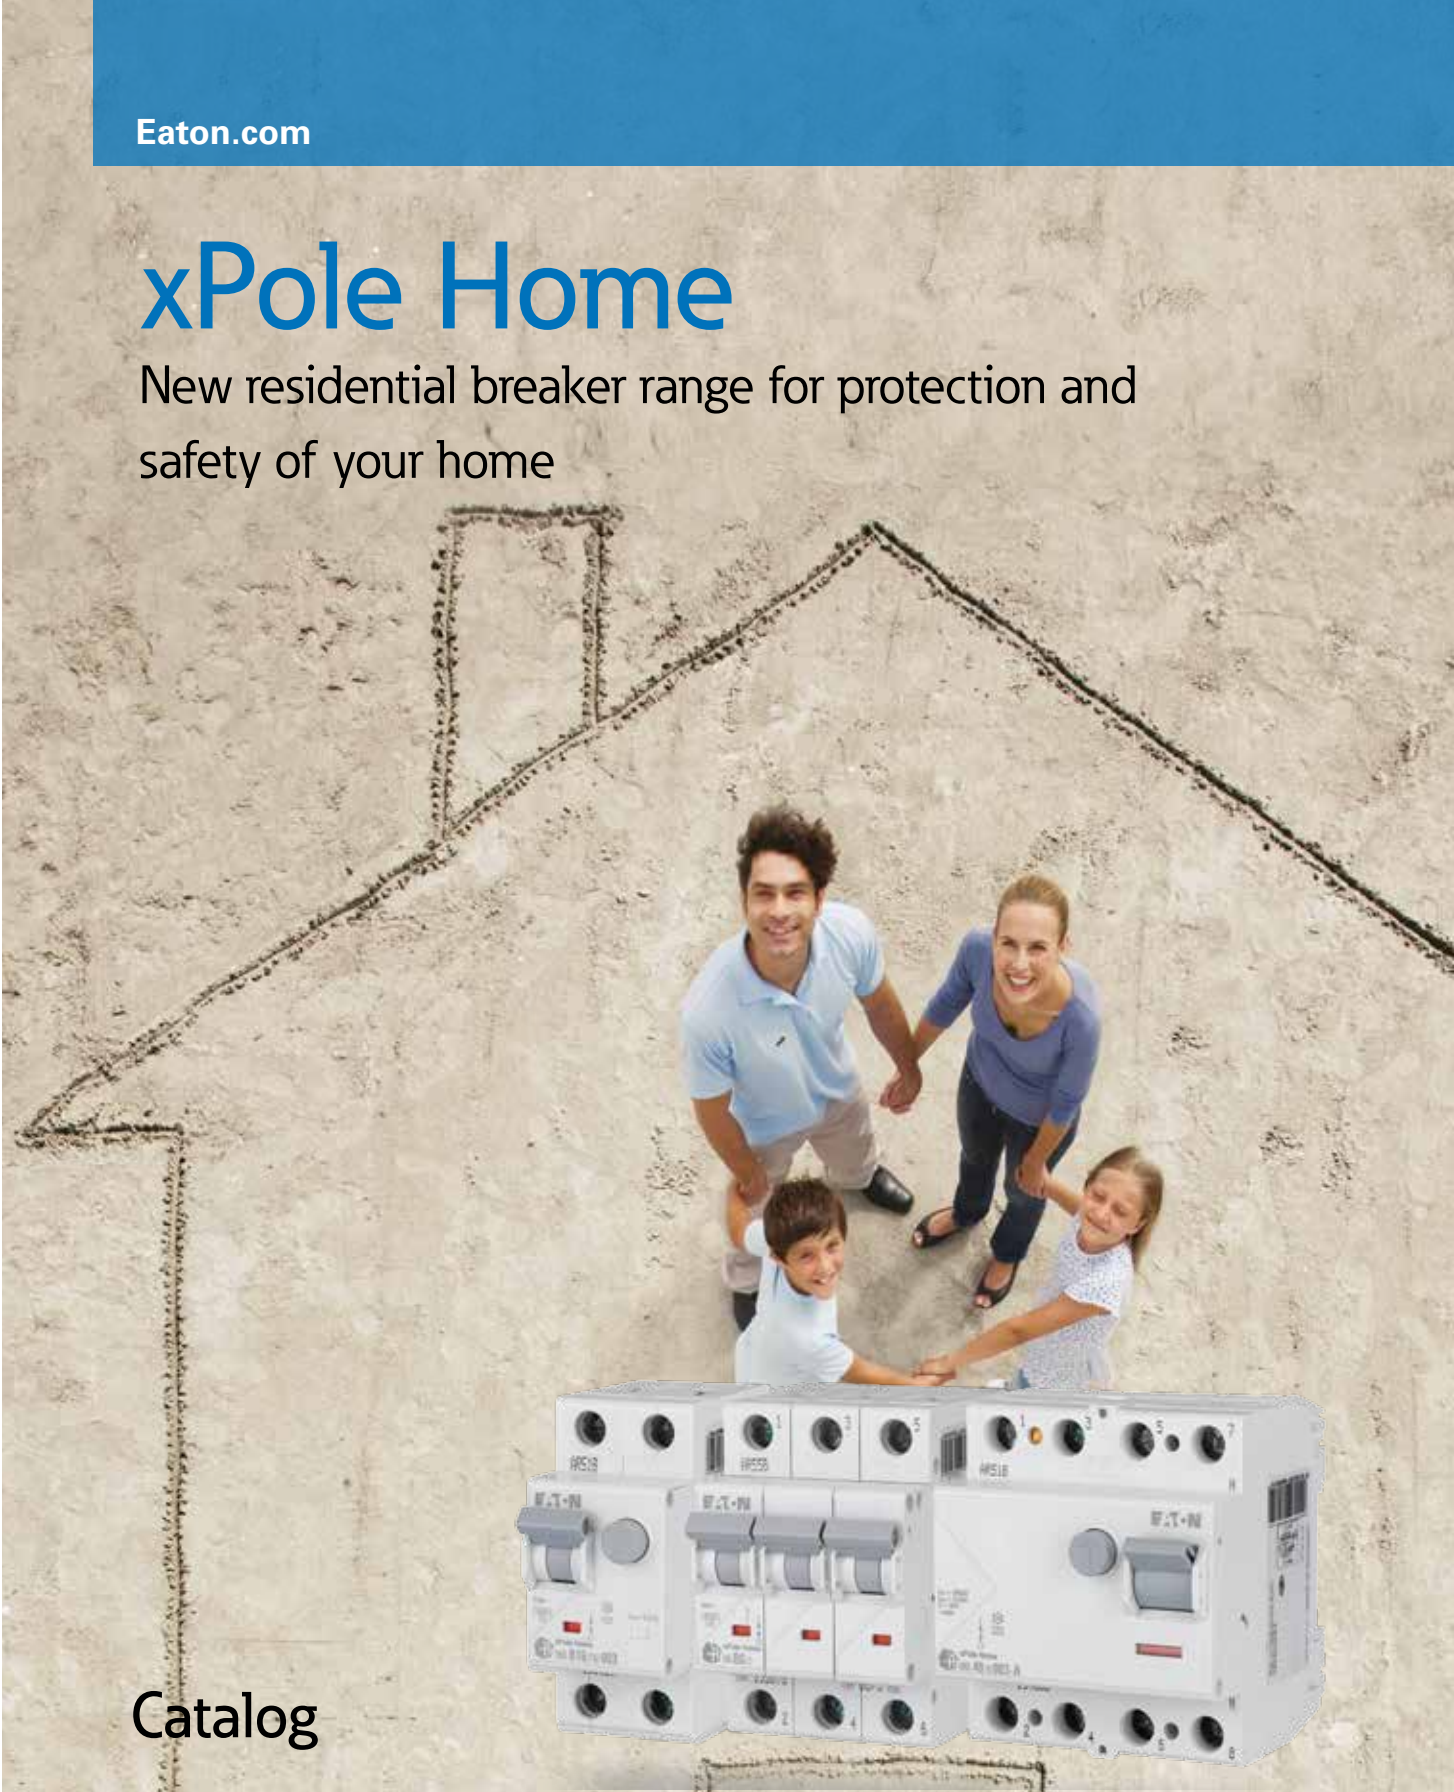

Powering Business Worldwide

sg01018_r



Description

- A compact range of residual current devices for a wide range of applications
- For fault current/residual current protection and additional protection
- Selection of nominal currents
- Comprehensive range of accessories
- Real contact position indicator

$I_n/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
---------------------------	---------------------	-------------	----------------------

Type AC

Conditionally surge current-proof 250 A, type AC 

sg02118_r



2-pole

25/0.03	HNC-25/2/003	194690	1/60
40/0.03	HNC-40/2/003	194691	1/60
63/0.03	HNC-63/2/003	194692	1/60

sg01018_r



4-pole

25/0.03	HNC-25/4/003	194693	1/30
40/0.03	HNC-40/4/003	194694	1/30
63/0.03	HNC-63/4/003	194695	1/30

Type A

Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, type A 

sg02118_r



2-pole

25/0.03	HNC-25/2/003-A	194684	1/60
40/0.03	HNC-40/2/003-A	194685	1/60
63/0.03	HNC-63/2/003-A	194686	1/60

sg01018_r



4-pole

25/0.03	HNC-25/4/003-A	194687	1/30
40/0.03	HNC-40/4/003-A	194688	1/30
63/0.03	HNC-63/4/003-A	194689	1/30

Specifications | Residual Current Devices HNC

Description

- Residual Current Devices
- Tripping is line voltage-independent. Consequently, the RCD is suitable for fault current/residual current protection and additional protection (ÖVE/ÖNORM E 8001-1 § 6.1.2)
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Universal tripping signal switch can be mounted subsequently
- Auxiliary switch Z-HK can be mounted subsequently
- Contact position indicator red - green
- Suitable for being used with standard fluorescent tubes with or without electronic ballast (typically up to 20 units per phase conductor)
- The device functions irrespective of the position of installation
- Tripping is line voltage-independent. Consequently, the RCD is suitable for "fault current/residual current protection" and "additional protection" within the meaning of the applicable installation rules
- Mains connection at either side
- The 4-pole device can also be used for 2- or 3-pole connection. See connection possibilities.
- The test key "T" must be pressed every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven (self-adhesive RCD-label enclosed). The test interval of 6 months is valid for residential and similar applications. Under all other conditions (e.g. damply or dusty environments), it's recommended to test in shorter intervals (e.g. monthly).
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement (R_E), or proper checking of the earth conductor condition redundant, which must be performed separately.
- **Type -A:** Protects against special forms of residual pulsating DC which have not been smoothed


Accessories:

Auxiliary switch for subsequent installation to the left	Z-HK	248432
Remote tripping module	Z-FAM	248293


Technical Data

		HNC
Electrical		
Design according to		IEC/EN 61008
Current test marks as printed onto the device		
Tripping		instantaneous
Rated voltage	U_n	230/400 V AC, 50 Hz
Rated tripping current	$I_{\Delta n}$	30 mA
Sensitivity		AC and pulsating DC
Rated insulation voltage	U_i	440 V
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50 μ s)
Rated short circuit strength	I_{en}	6 kA
Maximum back-up fuse		Short circuit Overload
$I_n = 25$ A		63 A gG/gL 16 A gG/gL
$I_n = 40$ A		63 A gG/gL 25 A gG/gL
$I_n = 63$ A		63 A gG/gL 40 A gG/gL
In the case that the maximal possible operating current of the electrical installation don't exceed the rated current of the RCD only short circuit protection must be implemented. Overload protection must be implemented in the case if the maximal possible operating current of the electrical installation can exceed the rated current of the RCD.		
Rated breaking capacity	I_m	
Rated fault breaking capacity	$I_{\Delta m}$	
$I_n = 25-40$ A		500 A
$I_n = 63$ A		630 A
Voltage range of test button		
2-pole		196 - 264 V~
4-pole		196 - 264 V~
Endurance		
electrical components		$\geq 4,000$ switching operations
mechanical components		$\geq 20,000$ switching operations
Mechanical		
Frame size		45 mm
Device height		80 mm
Device width		35 mm (2MU), 70 mm (4MU)
Mounting		quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in		IP40
Upper and lower terminals		open mouthed/lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		1.5 - 35 mm ² single wire 2 x 16 mm ² multi wire
Busbar thickness		0.8 - 2 mm
Tripping temperature		-25°C to +40°C
Storage- and transport temperature		-35°C to +60°C
Resistance to climatic conditions		25-55°C/90-95% relative humidity according to IEC 60068-2
Climatic conditions		Acc. to IEC 68-2 (25...55°C / 90...95% RH)

Connection diagrams




Dimensions (mm)

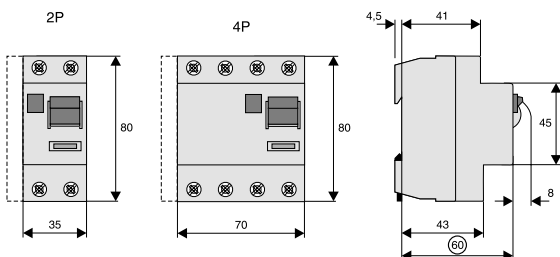


Correct connection

2-pole



4-pole

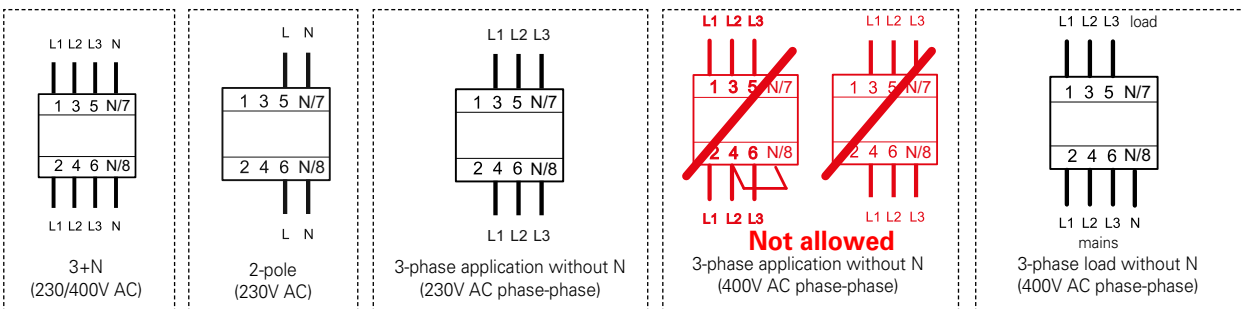

sg01018_r



Description

- A compact range of residual current devices for a wide range of applications
- For fault current/residual current protection and additional protection
- Selection of nominal currents
- Comprehensive range of accessories
- Real contact position indicator

$I_n/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
---------------------------	---------------------	-------------	----------------------

Type AC

Conditionally surge current-proof 250 A, type AC

sg02118_r



2-pole

25/0.1	HNC-25/2/01-HX	302342	1/60
25/0.03	HNC-25/2/003-HX	194702	1/60
40/0.1	HNC-40/2/01-HX	302343	1/60
40/0.03	HNC-40/2/003-HX	194703	1/60
63/0.1	HNC-63/2/01-HX	302344	1/60
63/0.03	HNC-63/2/003-HX	194704	1/60

sg01018_r



4-pole

25/0.1	HNC-25/4/01-HX	302345	1/30
25/0.03	HNC-25/4/003-HX	194705	1/30
40/0.1	HNC-40/4/01-HX	302346	1/30
40/0.03	HNC-40/4/003-HX	194706	1/30
63/0.1	HNC-63/4/01-HX	302347	1/30
63/0.03	HNC-63/4/003-HX	194707	1/30

Type A

Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, type A

sg02118_r



2-pole

25/0.03	HNC-25/2/003-A-HX	194696	1/60
40/0.03	HNC-40/2/003-A-HX	194697	1/60
63/0.03	HNC-63/2/003-A-HX	194698	1/60

sg01018_r



4-pole

25/0.03	HNC-25/4/003-A-HX	194699	1/30
40/0.03	HNC-40/4/003-A-HX	194700	1/30
63/0.03	HNC-63/4/003-A-HX	194701	1/30

Specifications | Residual Current Devices HNC-HX

Description

- Residual Current Devices
- Tripping is line voltage-independent. Consequently, the RCD is suitable for fault current/residual current protection and additional protection (ÖVE/ÖNORM E 8001-1 § 6.1.2)
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Universal tripping signal switch can be mounted subsequently
- Auxiliary switch Z-HK can be mounted subsequently
- Contact position indicator red - green
- Suitable for being used with standard fluorescent tubes with or without electronic ballast (typically up to 20 units per phase conductor)
- The device functions irrespective of the position of installation
- Tripping is line voltage-independent. Consequently, the RCD is suitable for "fault current/residual current protection" and "additional protection" within the meaning of the applicable installation rules
- Mains connection at either side
- The 4-pole device can also be used for 2- or 3-pole connection. See connection possibilities.
- The test key "T" must be pressed every 6 month. The system operator must be informed of this obligation and his responsibility in a way that can be proven (self-adhesive RCD-label enclosed). The test interval of 6 month is valid for residential and similar applications. Under all other conditions (e.g. damply or dusty environments), it's recommended to test in shorter intervals (e.g. monthly).
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement (R_E), or proper checking of the earth conductor condition redundant, which must be performed separately.
- **Type -A:** Protects against special forms of residual pulsating DC which have not been smoothed


Accessories:

Auxiliary switch for subsequent installation to the left	Z-HK	248432
Remote tripping module	Z-FAM	248293


Technical Data

		HNC-HX
Electrical		
Design according to		IEC/EN 61008
Current test marks as printed onto the device		
Tripping		instantaneous
Rated voltage	U_n	230/400 V AC, 50 Hz
Rated tripping current	$I_{\Delta n}$	30 mA
Sensitivity		AC and pulsating DC
Rated insulation voltage	U_i	440 V
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50 μ s)
Rated short circuit strength	I_{en}	6 kA
Maximum back-up fuse		Short circuit Overload
$I_n = 25$ A		63 A gG/gL 16 A gG/gL
$I_n = 40$ A		63 A gG/gL 25 A gG/gL
$I_n = 63$ A		63 A gG/gL 40 A gG/gL
In the case that the maximal possible operating current of the electrical installation don't exceed the rated current of the RCD only short circuit protection must be implemented. Overload protection must be implemented in the case if the maximal possible operating current of the electrical installation can exceed the rated current of the RCD.		
Rated breaking capacity	I_m	
Rated fault breaking capacity	$I_{\Delta m}$	
$I_n = 25-40$ A		500 A
$I_n = 63$ A		630 A
Voltage range of test button		
2-pole		196 - 264 V~
4-pole		196 - 264 V~
Endurance		
electrical components		$\geq 4,000$ switching operations
mechanical components		$\geq 20,000$ switching operations
Mechanical		
Frame size		45 mm
Device height		80 mm
Device width		35 mm (2MU), 70 mm (4MU)
Mounting		quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in		IP40
Upper and lower terminals		open mouthed/lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		1.5 - 35 mm ² single wire 2 x 16 mm ² multi wire
Busbar thickness		0.8 - 2 mm
Tripping temperature		-25°C to +40°C
Storage- and transport temperature		-35°C to +60°C
Resistance to climatic conditions		25-55°C/90-95% relative humidity according to IEC 60068-2
Climatic conditions		Acc. to IEC 68-2 (25...55°C / 90...95% RH)

Connection diagrams




Dimensions (mm)

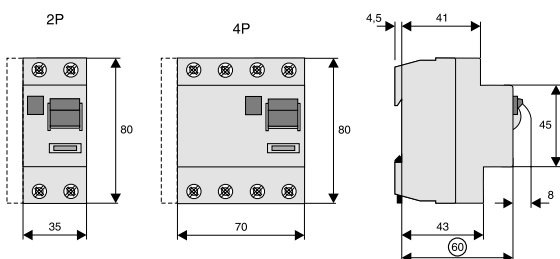


Correct connection

2-pole



4-pole

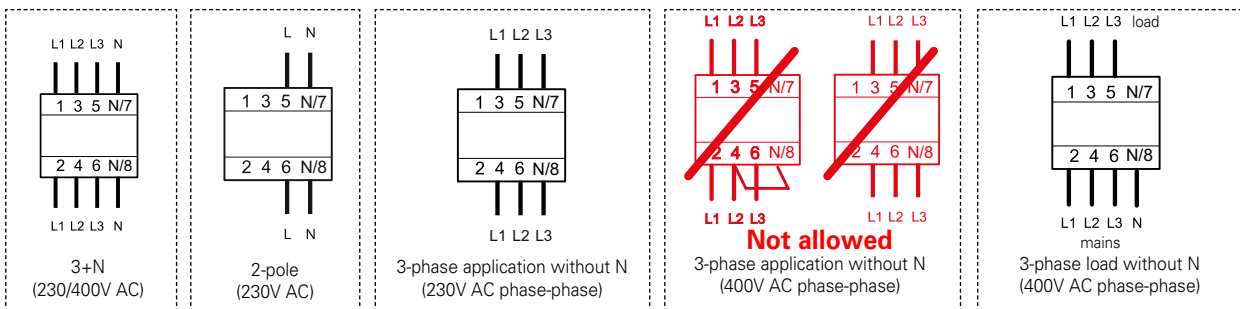

1.12

sg00818_r



Description

- High-quality residual current device / miniature circuit breaker combination, line voltage-independent
- Contact position indicator red - green
- Comprehensive range of accessories can be mounted subsequently
- 3-position DIN rail clip, permits removal from existing busbar system
- Rated currents up to 25 A
- Tripping characteristics B, C
- Rated breaking capacity 6 kA

$I_n/I_{\Delta n}$
(A)

Type
Designation

Article No.

Units per
package

Type A

6 kA, 1+N-pole

Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, type A

sg00818_r



Characteristic B

$I_n/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
6/0.03	HNB-B6/1N/003-A	195130	1/60
10/0.03	HNB-B10/1N/003-A	195131	1/60
13/0.03	HNB-B13/1N/003-A	195132	1/60
16/0.03	HNB-B16/1N/003-A	195133	1/60
20/0.03	HNB-B20/1N/003-A	195134	1/60
25/0.03	HNB-B25/1N/003-A	195135	1/60

sg00818_r



Characteristic C

$I_n/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
6/0.03	HNB-C6/1N/003-A	195136	1/60
10/0.03	HNB-C10/1N/003-A	195137	1/60
13/0.03	HNB-C13/1N/003-A	195138	1/60
16/0.03	HNB-C16/1N/003-A	195139	1/60
20/0.03	HNB-C20/1N/003-A	195140	1/60
25/0.03	HNB-C25/1N/003-A	195141	1/60

Type AC

6 kA, 1+N-pole

Conditionally surge current-proof 250 A, type AC

sg00818_r



Characteristic B

$I_n/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
6/0.03	HNB-B6/1N/003	195118	1/60
10/0.03	HNB-B10/1N/003	195119	1/60
13/0.03	HNB-B13/1N/003	195120	1/60
16/0.03	HNB-B16/1N/003	195121	1/60
20/0.03	HNB-B20/1N/003	195122	1/60
25/0.03	HNB-B25/1N/003	195123	1/60

sg00818_r



Characteristic C

$I_n/I_{\Delta n}$ (A)	Type Designation	Article No.	Units per package
6/0.03	HNB-C6/1N/003	195124	1/60
10/0.03	HNB-C10/1N/003	195125	1/60
13/0.03	HNB-C13/1N/003	195126	1/60
16/0.03	HNB-C16/1N/003	195127	1/60
20/0.03	HNB-C20/1N/003	195128	1/60
25/0.03	HNB-C25/1N/003	195129	1/60

Specifications | RCBO Devices HNB xPole Home

Description

- Combined RCD/MCB Devices
- Line voltage-independent tripping
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Contact position indicator red - green
- Comprehensive range of accessories can be mounted subsequently
- The test key "T" must be pressed every 6 month. The system operator must be informed of this obligation and his responsibility in a way that can be proven (self-adhesive RCD-label enclosed). The test interval of 6 month is valid for residential and similar applications. Under all other conditions (e.g. damply or dusty environments), it's recommended to test in shorter intervals (e.g. monthly).
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement (R_E), or proper checking of the earth conductor condition redundant, which must be performed separately.
- **Type -A:** Protects against special forms of residual pulsating DC which have not been smoothed

Accessories:


Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Shunt trip release	ZP-ASA/..	248438, 248439
Terminal cover cap	KLV-TC-2	276240
Additional terminal 35 mm ²	Z-HA-EK/35	263960

Technical Data


		HNB, 1+N-pole
Electrical		
Design according to		IEC/EN 61009
Current test marks as printed onto the device		
Line voltage-independent tripping		instantaneous 250 A (8/20 μ s), surge current proof
Rated voltage	U_e	230 V AC; 50 Hz
Operational voltage range		196-253 V
Rated tripping current	$I_{\Delta n}$	30 mA
Rated non-tripping current	$I_{\Delta no}$	0.5 $I_{\Delta n}$
Sensitivity		AC and pulsating DC
Selectivity class		3
Rated breaking capacity	I_{cn}	6 kA
Rated current		6 - 25 A
Rated impulse withstand voltage	U_{mp}	4 kV (1.2/50 μ s)
Characteristic		B, C
Maximum back-up fuse (short circuit)		100 A gL (>6 kA)
Endurance		
electrical components		\geq 4,000 switching operations
mechanical components		\geq 20,000 switching operations
Mechanical		
Frame size		45 mm
Device height		80 mm
Device width		35 mm (2MU)
Mounting		3-position DIN rail clip, permits removal from existing busbar system
Degree of protection, switch		IP20
Degree of protection, built-in		IP40
Upper and lower terminals		open mouthed/lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		1 - 25 mm ²
Terminal torque		2 - 2.4 Nm
Busbar thickness		0.8 - 2 mm
Tripping temperature		-25°C to +40°C
Storage- and transport temperature		-35°C to +60°C
Resistance to climatic conditions		according to IEC/EN 61009
Climatic conditions		Acc. to IEC 68-2 (25...55°C / 90...95% RH)

Connection diagram

1+N-pole



Dimensions (mm)




Load Capacity HNB

Effect of ambient temperature (MCB component)

I _n [A]	Ambient temperature T [°C]								
	-25	-20	-10	0	10	20	30	35	40
6	7.4	7.2	7.0	6.7	6.5	6.3	6.0	5.9	5.8
10	12	12	12	11	11	10	10	9.9	9.7
13	16	16	15	15	14	14	13	13	13
16	20	19	19	18	17	17	16	16	15
20	25	24	23	22	22	21	20	20	19
25	31	30	29	28	27	26	25	25	24

Tripping Characteristic HNB, Characteristics B and C

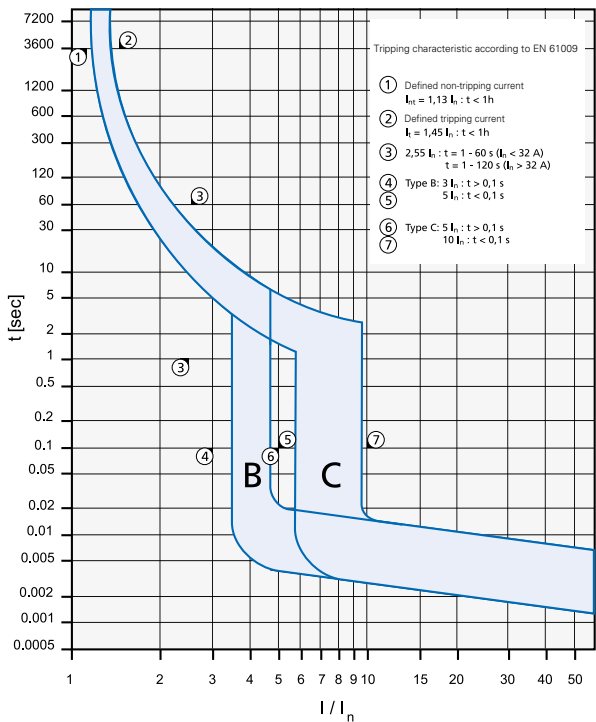

Short Circuit Selectivity HNB towards DII-DIV fuse link

In case of short circuit, there is selectivity between the combined RCD/MCB devices HNB and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{sc} under I_s, only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b

Short circuit selectivity **Characteristic B** towards fuse link **DII-DIV***

HNB I _n [A]	DII-DIV gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.7	1.0	2.9	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10		0.6	0.9	1.9	3.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
13		0.5	0.7	1.6	2.8	5.7	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
16			0.7	1.4	2.4	4.4	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
20				1.3	2.2	4.0	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
25				1.3	2.1	3.8	5.8	6.0 ²⁾	6.0 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **DII-DIV***

HNB I _n [A]	DII-DIV gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.6	1.0	2.9	5.8	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10		<0.5	0.7	1.5	2.6	5.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
13				1.4	2.3	4.6	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
16				1.2	1.8	3.4	5.5	6.0 ²⁾	6.0 ²⁾
20				1.2	1.7	3.1	5.0	6.0 ²⁾	6.0 ²⁾
25					1.6	2.9	4.6	6.0 ²⁾	6.0 ²⁾

¹⁾ Selectivity limit current I_s under 0.5 kA.

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the RCD/MCB device

Darker areas: no selectivity



Short Circuit Selectivity HNB towards D01-D03 fuse link

In case of short circuit, there is selectivity between the combined RCD/MCB devices HNB and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{sc} under I_s , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b

Short circuit selectivity **Characteristic B** towards fuse link **D01-D03***

HNB I_n [A]	D01-D03 gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.5	0.8	2.4	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10		0.5	0.8	1.6	3.7	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
13		0.6	0.7	1.4	3.0	4.7	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
16			0.6	1.2	2.6	3.9	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
20				1.2	2.5	3.6	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
25				1.2	2.3	3.3	5.7	6.0 ²⁾	6.0 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **D01-D03***

HNB I_n [A]	D01-D03 gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	<0.5 ¹⁾	0.8	2.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10		<0.5	0.6	1.3	2.9	4.5	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
13				1.2	2.5	3.9	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
16				1.0	2.1	3.0	5.5	6.0 ²⁾	6.0 ²⁾
20				1.0	2.0	2.7	5.0	6.0 ²⁾	6.0 ²⁾
25					1.9	2.6	4.5	6.0 ²⁾	6.0 ²⁾

Short Circuit Selectivity HNB towards NH-00 fuse link

In case of short circuit, there is selectivity between the combined RCD/MCB devices HNB and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{sc} under I_s , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b

Short circuit selectivity **Characteristic B** towards fuse link **NH-00***

HNB I_n [A]	D01-D03 gL/gG									
	16	20	25	32	35	40	50	63	80	100
6	<0.5 ¹⁾	0.5	0.8	1.4	2.2	3.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10		<0.5 ¹⁾	0.7	0.9	1.5	2.1	3.4	4.3	6.0 ²⁾	6.0 ²⁾
13		<0.5 ¹⁾	0.6	0.8	1.4	1.8	2.8	3.6	5.7	6.0 ²⁾
16			0.6	0.7	1.2	1.5	2.4	3.0	4.5	6.0 ²⁾
20				0.7	1.1	1.5	2.2	2.8	4.2	6.0 ²⁾
25				0.7	1.1	1.4	2.1	2.6	4.0	6.0 ²⁾


Short circuit selectivity **Characteristic C** towards fuse link **NH-00***

HNB I_n [A]	D01-D03 gL/gG									
	16	20	25	32	35	40	50	63	80	100
6	<0.5 ¹⁾	<0.5 ¹⁾	0.7	1.3	2.2	3.3	5.9	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10			0.5	0.8	1.2	1.7	2.7	3.4	5.5	6.0 ²⁾
13					1.1	1.5	2.3	2.9	4.7	6.0 ²⁾
16					1.0	1.3	1.8	2.3	3.7	6.0 ²⁾
20					0.9	1.1	1.7	2.2	3.4	6.0 ²⁾
25						1.6	2.1	3.2	6.0 ²⁾	6.0 ²⁾

¹⁾ Selectivity limit current I_s under 0.5 kA.


²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the RCD/MCB device

Darker areas: no selectivity




Let-through Energy HNB

Let-through Energy HNB, Characteristic B, 1+N-pole

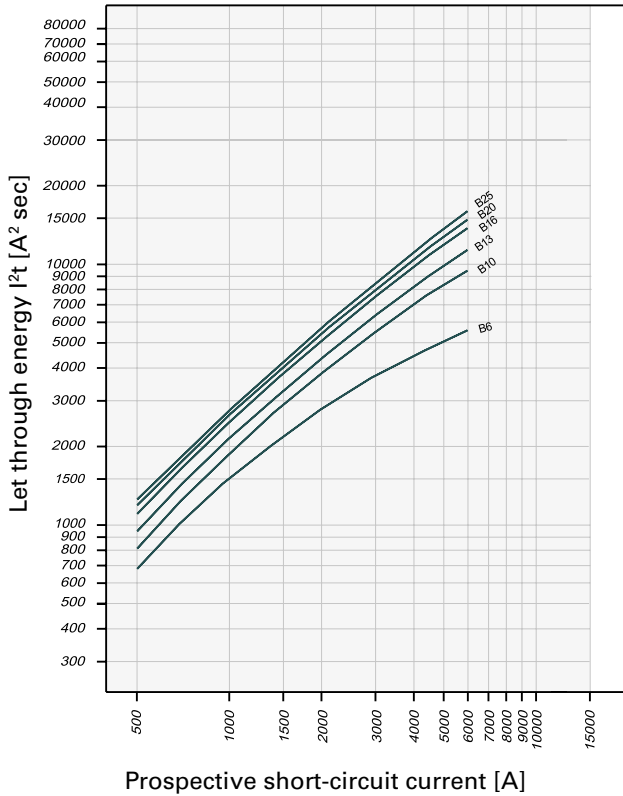

Let-through Energy HNB, Characteristic C, 1+N-pole

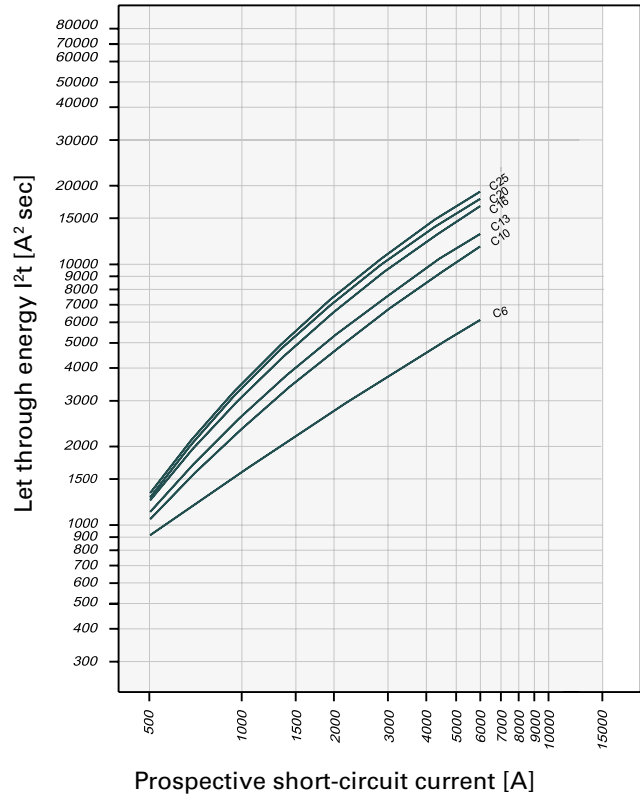

sg00818_r



Description

- High-quality residual current device / miniature circuit breaker combination, line voltage-independent
- Contact position indicator red - green
- Comprehensive range of accessories can be mounted subsequently
- 3-position DIN rail clip, permits removal from existing busbar system
- Rated currents up to 25 A
- Tripping characteristics B, C
- Rated breaking capacity 6 kA

$I_n/I_{\Delta n}$
(A)

Type
Designation

Article No. Units per
package

Type A

6 kA, 1+N-pole
Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, type A

sg00818_r



Characteristic B

$I_n/I_{\Delta n}$	Type Designation	Article No.	Units per package
6/0.03	HNB-B6/1N/003-A-HX	195154	1/60
10/0.03	HNB-B10/1N/003-A-HX	195155	1/60
13/0.03	HNB-B13/1N/003-A-HX	195156	1/60
16/0.03	HNB-B16/1N/003-A-HX	195157	1/60
20/0.03	HNB-B20/1N/003-A-HX	195158	1/60
25/0.03	HNB-B25/1N/003-A-HX	195159	1/60

sg00818_r



Characteristic C

$I_n/I_{\Delta n}$	Type Designation	Article No.	Units per package
6/0.03	HNB-C6/1N/003-A-HX	195160	1/60
10/0.03	HNB-C10/1N/003-A-HX	195161	1/60
13/0.03	HNB-C13/1N/003-A-HX	195162	1/60
16/0.03	HNB-C16/1N/003-A-HX	195163	1/60
20/0.03	HNB-C20/1N/003-A-HX	195164	1/60
25/0.03	HNB-C25/1N/003-A-HX	195165	1/60

Type AC

6 kA, 1+N-pole
Conditionally surge current-proof 250 A, type AC

sg00818_r



Characteristic B

$I_n/I_{\Delta n}$	Type Designation	Article No.	Units per package
6/0.03	HNB-B6/1N/003-HX	195142	1/60
10/0.03	HNB-B10/1N/003-HX	195143	1/60
13/0.03	HNB-B13/1N/003-HX	195144	1/60
16/0.03	HNB-B16/1N/003-HX	195145	1/60
20/0.03	HNB-B20/1N/003-HX	195146	1/60
25/0.03	HNB-B25/1N/003-HX	195147	1/60

sg00818_r



Characteristic C

$I_n/I_{\Delta n}$	Type Designation	Article No.	Units per package
6/0.03	HNB-C6/1N/003-HX	195148	1/60
10/0.03	HNB-C10/1N/003-HX	195149	1/60
13/0.03	HNB-C13/1N/003-HX	195150	1/60
16/0.03	HNB-C16/1N/003-HX	195151	1/60
20/0.03	HNB-C20/1N/003-HX	195152	1/60
25/0.03	HNB-C25/1N/003-HX	195153	1/60

Specifications | RCBO Devices HNB-HX xPole Home

Description

- Combined RCD/MCB Devices
- Line voltage-independent tripping
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Contact position indicator red - green
- Comprehensive range of accessories can be mounted subsequently
- The test key "T" must be pressed every 6 month. The system operator must be informed of this obligation and his responsibility in a way that can be proven (self-adhesive RCD-label enclosed). The test interval of 6 month is valid for residential and similar applications. Under all other conditions (e.g. damply or dusty environments), it's recommended to test in shorter intervals (e.g. monthly).
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement (R_E), or proper checking of the earth conductor condition redundant, which must be performed separately.
- **Type -A:** Protects against special forms of residual pulsating DC which have not been smoothed

Accessories:


Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Shunt trip release	ZP-ASA/..	248438, 248439
Terminal cover cap	KLV-TC-2	276240
Additional terminal 35 mm ²	Z-HA-EK/35	263960

Technical Data


		HNB-HX, 1+N-pole
Electrical		
Design according to		IEC/EN 61009
Current test marks as printed onto the device		
Line voltage-independent tripping		instantaneous 250 A (8/20 μs), surge current proof
Rated voltage	U_e	230 V AC; 50 Hz
Operational voltage range		196-253 V
Rated tripping current	$I_{\Delta n}$	30 mA
Rated non-tripping current	$I_{\Delta no}$	0.5 $I_{\Delta n}$
Sensitivity		AC and pulsating DC
Selectivity class		3
Rated breaking capacity	I_{cn}	6 kA
Rated current		6 - 25 A
Rated impulse withstand voltage	U_{mp}	4 kV (1.2/50 μs)
Characteristic		B, C
Maximum back-up fuse (short circuit)		100 A gL (>6 kA)
Endurance		
electrical components		≥ 4,000 switching operations
mechanical components		≥ 20,000 switching operations
Mechanical		
Frame size		45 mm
Device height		80 mm
Device width		35 mm (2MU)
Mounting		3-position DIN rail clip, permits removal from existing busbar system
Degree of protection, switch		IP20
Degree of protection, built-in		IP40
Upper and lower terminals		open mouthed/lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		1 - 25 mm ²
Terminal torque		2 - 2.4 Nm
Busbar thickness		0.8 - 2 mm
Tripping temperature		-25°C to +40°C
Storage- and transport temperature		-35°C to +60°C
Resistance to climatic conditions		according to IEC/EN 61009
Climatic conditions		Acc. to IEC 68-2 (25...55°C / 90...95% RH)

Connection diagram

1+N-pole



Dimensions (mm)




Load Capacity HNB-HX

Effect of ambient temperature (MCB component)

I_n [A]	Ambient temperature T [°C]								
	-25	-20	-10	0	10	20	30	35	40
6	7.4	7.2	7.0	6.7	6.5	6.3	6.0	5.9	5.8
10	12	12	12	11	11	10	10	9.9	9.7
13	16	16	15	15	14	14	13	13	13
16	20	19	19	18	17	17	16	16	15
20	25	24	23	22	22	21	20	20	19
25	31	30	29	28	27	26	25	25	24

Tripping Characteristic HNB-HX, Characteristics B and C

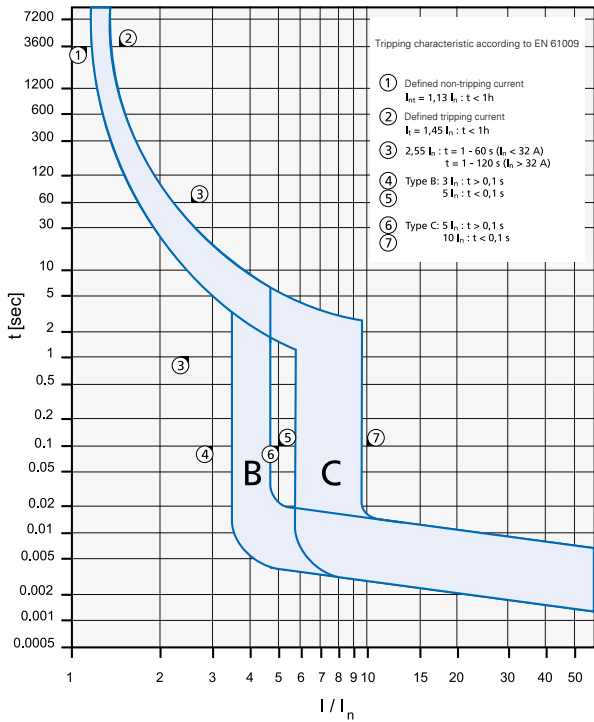

Short Circuit Selectivity HNB-HX towards DII-DIV fuse link

In case of short circuit, there is selectivity between the combined RCD/MCB devices HNB-HX and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{sc} under I_s , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b

Short circuit selectivity **Characteristic B** towards fuse link **DII-DIV***

HNB-HX I_n [A]	DII-DIV gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.7	1.0	2.9	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10		0.6	0.9	1.9	3.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
13		0.5	0.7	1.6	2.8	5.7	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
16			0.7	1.4	2.4	4.4	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
20				1.3	2.2	4.0	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
25				1.3	2.1	3.8	5.8	6.0 ²⁾	6.0 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **DII-DIV***

HNB-HX I_n [A]	DII-DIV gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.6	1.0	2.9	5.8	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10		<0.5	0.7	1.5	2.6	5.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
13				1.4	2.3	4.6	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
16				1.2	1.8	3.4	5.5	6.0 ²⁾	6.0 ²⁾
20				1.2	1.7	3.1	5.0	6.0 ²⁾	6.0 ²⁾
25					1.6	2.9	4.6	6.0 ²⁾	6.0 ²⁾

¹⁾ Selectivity limit current I_s under 0.5 kA.

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the RCD/MCB device

Darker areas: no selectivity



Short Circuit Selectivity HNB-HX towards D01-D03 fuse link

In case of short circuit, there is selectivity between the combined RCD/MCB devices HNB-HX and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{sc} under I_s , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b

Short circuit selectivity **Characteristic B** towards fuse link **D01-D03***

HNB-HX	D01-D03 gL/gG								
I_n [A]	10	16	20	25	35	50	63	80	100
6		<0.5 ¹⁾	0.5	0.8	2.4	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10			0.5	0.8	1.6	3.7	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
13			0.6	0.7	1.4	3.0	4.7	6.0 ²⁾	6.0 ²⁾
16				0.6	1.2	2.6	3.9	6.0 ²⁾	6.0 ²⁾
20					1.2	2.5	3.6	6.0 ²⁾	6.0 ²⁾
25					1.2	2.3	3.3	5.7	6.0 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **D01-D03***

HNB-HX	D01-D03 gL/gG								
I_n [A]	10	16	20	25	35	50	63	80	100
6		<0.5 ¹⁾	<0.5 ¹⁾	0.8	2.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10			<0.5	0.6	1.3	2.9	4.5	6.0 ²⁾	6.0 ²⁾
13					1.2	2.5	3.9	6.0 ²⁾	6.0 ²⁾
16					1.0	2.1	3.0	5.5	6.0 ²⁾
20					1.0	2.0	2.7	5.0	6.0 ²⁾
25						1.9	2.6	4.5	6.0 ²⁾

Short Circuit Selectivity HNB-HX towards NH-00 fuse link

In case of short circuit, there is selectivity between the combined RCD/MCB devices HNB-HX and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{sc} under I_s , only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b

Short circuit selectivity **Characteristic B** towards fuse link **NH-00***

HNB-HX	D01-D03 gL/gG									
I_n [A]	16	20	25	32	35	40	50	63	80	100
6	<0.5 ¹⁾	0.5	0.8	1.4	2.2	3.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10		<0.5 ¹⁾	0.7	0.9	1.5	2.1	3.4	4.3	6.0 ²⁾	6.0 ²⁾
13		<0.5 ¹⁾	0.6	0.8	1.4	1.8	2.8	3.6	5.7	6.0 ²⁾
16			0.6	0.7	1.2	1.5	2.4	3.0	4.5	6.0 ²⁾
20				0.7	1.1	1.5	2.2	2.8	4.2	6.0 ²⁾
25				0.7	1.1	1.4	2.1	2.6	4.0	6.0 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **NH-00***

HNB-HX	D01-D03 gL/gG									
I_n [A]	16	20	25	32	35	40	50	63	80	100
6	<0.5 ¹⁾	<0.5 ¹⁾	0.7	1.3	2.2	3.3	5.9	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10			0.5	0.8	1.2	1.7	2.7	3.4	5.5	6.0 ²⁾
13					1.1	1.5	2.3	2.9	4.7	6.0 ²⁾
16					1.0	1.3	1.8	2.3	3.7	6.0 ²⁾
20					0.9	1.1	1.7	2.2	3.4	6.0 ²⁾
25						1.6	2.1	3.2	6.0 ²⁾	

¹⁾ Selectivity limit current I_s under 0.5 kA.


²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the RCD/MCB device

Darker areas: no selectivity




Let-through Energy HNB-HX

Let-through Energy HNB-HX, Characteristic B, 1+N-pole

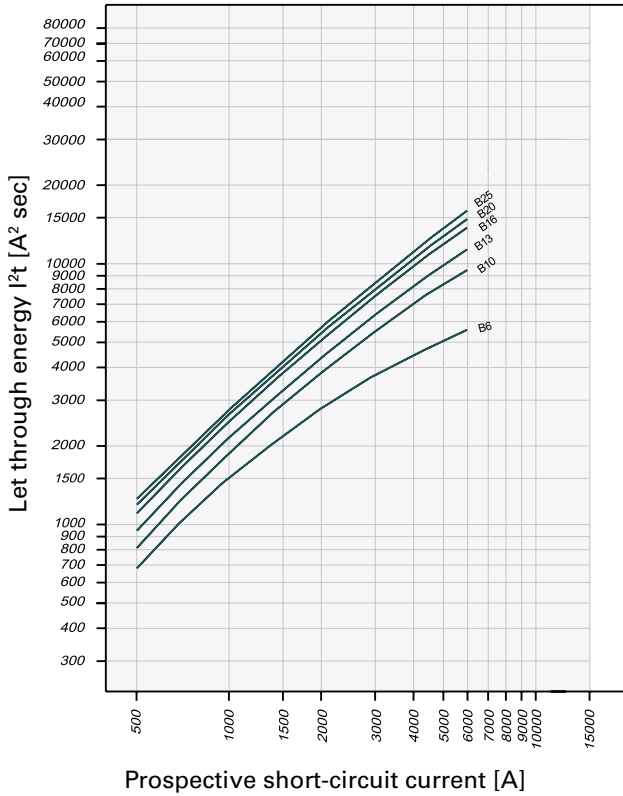

Let-through Energy HNB-HX, Characteristic C, 1+N-pole

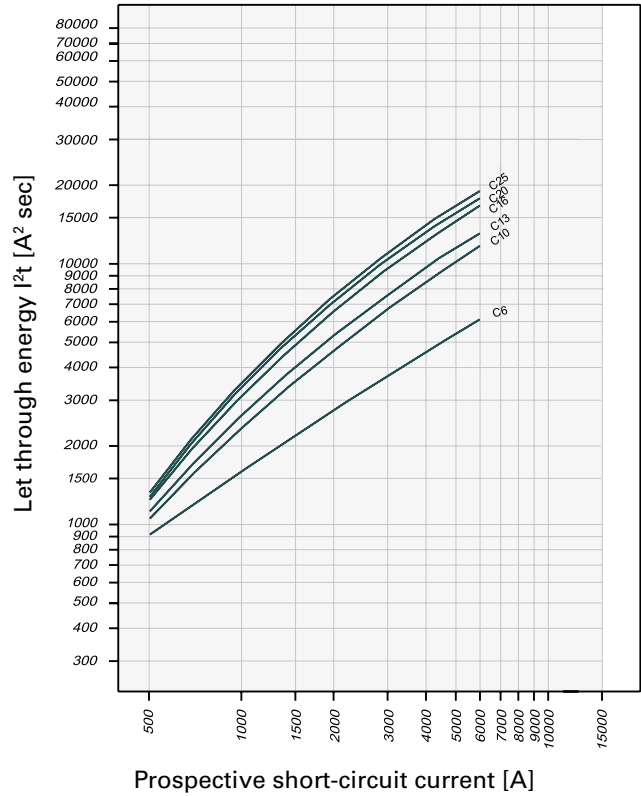

sg03518_r



Description

- High-quality miniature circuit breakers for commercial and residential applications
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 63 A
- Tripping characteristics B, C
- Rated breaking capacity 4.5 kA according to IEC/EN 60898-1

Rated current I_n (A)	Type Designation	Article No.	Units per package
----------------------------	---------------------	-------------	----------------------

4.5 kA, Characteristic B

sg02818_r



1-pole

6	HL-B6/1	194718	12/120
10	HL-B10/1	194719	12/120
13	HL-B13/1	194720	12/120
16	HL-B16/1	194721	12/120
20	HL-B20/1	194722	12/120
25	HL-B25/1	194723	12/120
32	HL-B32/1	194724	12/120
40	HL-B40/1	194725	12/120
50	HL-B50/1	194726	12/120
63	HL-B63/1	194727	12/120

sg03218_r



1+N-pole

6	HL-B6/1N	194738	6/60
10	HL-B10/1N	194739	6/60
13	HL-B13/1N	194740	6/60
16	HL-B16/1N	194741	6/60
20	HL-B20/1N	194742	6/60
25	HL-B25/1N	194743	6/60
32	HL-B32/1N	194744	6/60
40	HL-B40/1N	194745	6/60
50	HL-B50/1N	194746	6/60
63	HL-B63/1N	194747	6/60

sg03018_r



2-pole

6	HL-B6/2	194758	6/60
10	HL-B10/2	194759	6/60
13	HL-B13/2	194760	6/60
16	HL-B16/2	194761	6/60
20	HL-B20/2	194762	6/60
25	HL-B25/2	194763	6/60
32	HL-B32/2	194764	6/60
40	HL-B40/2	194765	6/60
50	HL-B50/2	194766	6/60
63	HL-B63/2	194767	6/60

sg03318_r



3-pole

6	HL-B6/3	194778	4/40
10	HL-B10/3	194779	4/40
13	HL-B13/3	194780	4/40
16	HL-B16/3	194781	4/40
20	HL-B20/3	194782	4/40
25	HL-B25/3	194783	4/40
32	HL-B32/3	194784	4/40
40	HL-B40/3	194785	4/40
50	HL-B50/3	194786	4/40
63	HL-B63/3	194787	4/40

sg03518_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
3+N-pole			
6	HL-B6/3N	194798	3/30
10	HL-B10/3N	194799	3/30
13	HL-B13/3N	194800	3/30
16	HL-B16/3N	194801	3/30
20	HL-B20/3N	194802	3/30
25	HL-B25/3N	194803	3/30
32	HL-B32/3N	194804	3/30
40	HL-B40/3N	194805	3/30
50	HL-B50/3N	194806	3/30
63	HL-B63/3N	194807	3/30

sg02818_r



4.5 kA, Characteristic C

Rated current I_n (A)	Type Designation	Article No.	Units per package
1-pole			
6	HL-C6/1	194728	12/120
10	HL-C10/1	194729	12/120
13	HL-C13/1	194730	12/120
16	HL-C16/1	194731	12/120
20	HL-C20/1	194732	12/120
25	HL-C25/1	194733	12/120
32	HL-C32/1	194734	12/120
40	HL-C40/1	194735	12/120
50	HL-C50/1	194736	12/120
63	HL-C63/1	194737	12/120

sg03218_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
1+N-pole			
6	HL-C6/1N	194748	6/60
10	HL-C10/1N	194749	6/60
13	HL-C13/1N	194750	6/60
16	HL-C16/1N	194751	6/60
20	HL-C20/1N	194752	6/60
25	HL-C25/1N	194753	6/60
32	HL-C32/1N	194754	6/60
40	HL-C40/1N	194755	6/60
50	HL-C50/1N	194756	6/60
63	HL-C63/1N	194757	6/60

sg03018_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
2-pole			
6	HL-C6/2	194768	6/60
10	HL-C10/2	194769	6/60
13	HL-C13/2	194770	6/60
16	HL-C16/2	194771	6/60
20	HL-C20/2	194772	6/60
25	HL-C25/2	194773	6/60
32	HL-C32/2	194774	6/60
40	HL-C40/2	194775	6/60
50	HL-C50/2	194776	6/60
63	HL-C63/2	194777	6/60

Miniature Circuit Breakers HL xPole Home

sg03318_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
3-pole			
6	HL-C6/3	194788	4/40
10	HL-C10/3	194789	4/40
13	HL-C13/3	194790	4/40
16	HL-C16/3	194791	4/40
20	HL-C20/3	194792	4/40
25	HL-C25/3	194793	4/40
32	HL-C32/3	194794	4/40
40	HL-C40/3	194795	4/40
50	HL-C50/3	194796	4/40
63	HL-C63/3	194797	4/40

sg03518_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
3+N-pole			
6	HL-C6/3N	194808	3/30
10	HL-C10/3N	194809	3/30
13	HL-C13/3N	194810	3/30
16	HL-C16/3N	194811	3/30
20	HL-C20/3N	194812	3/30
25	HL-C25/3N	194813	3/30
32	HL-C32/3N	194814	3/30
40	HL-C40/3N	194815	3/30
50	HL-C50/3N	194816	3/30
63	HL-C63/3N	194817	3/30

Specifications | Miniature Circuit Breakers HL

Description

- High selectivity between and back-up fuse due to low let-through energy
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Meets the requirements of insulation co-ordination, distance between contacts ≥ 4 mm, for secure isolation
- Suitable for applications up to 48 V DC


Accessories:

Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Remote control and automatic switching device	Z-FW/LP	248296
Shunt trip release	ZP-ASA/..	248438, 248439
Undervoltage release	Z-USA/..	248288-248291
Compact enclosure	KLV-TC-2	276240
	KLV-TC-4	276241
Additional terminal 35 mm ²	Z-HA-EK/35	263960
Switching interlock	Z-IS/SPE-1TE	274418


Technical Data

		HL
Electrical		
Design according to		IEC/EN 60898-1
Current test marks as printed onto the device		
Rated voltage	U_n	AC: 230/400 V DC: 48 V (per pole, max. 2 poles)
Rated frequency		50/60 Hz
Rated breaking capacity according to IEC/EN 60898-1	I_{cn}	4.5 kA
Characteristic		B, C
Back-up fuse		max. 100 A gL
Selectivity class		3
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50 μ s)
Endurance		
electrical components		$\geq 10,000$ switching operations
mechanical components		$\geq 20,000$ switching operations
Line voltage connection		at will (above/below)
Minimal voltage		12 V AC/DC
Mechanical		
Frame size		45 mm
Device height		80 mm
Device width		17.5 mm per pole (1MU)
Mounting		quick fastening with 3 lock-in positions on DIN rail IEC/EN 60715
Degree of protection		IP20
Upper and lower terminals		open mouthed/lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		1-25 mm ²
Terminal torque		2-2.4 Nm
Busbar thickness		0.8 - 2 mm
Mounting		independent of position
Climatic conditions		Acc. to IEC 68-2 (25...55°C / 90...95% RH)

Connection diagrams

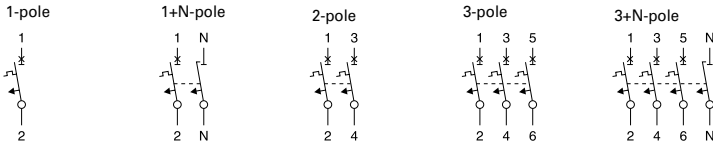


Dimensions (mm)

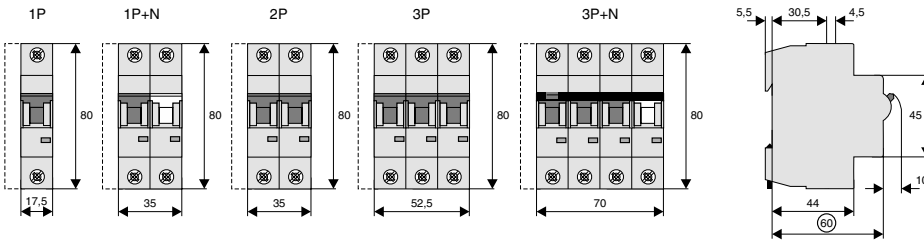


Tripping Characteristics (IEC/EN 60898-1)

Tripping characteristic B

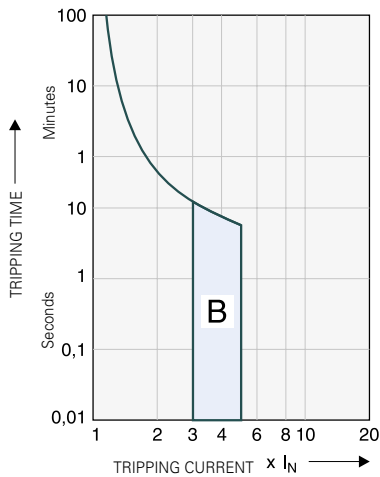

Tripping characteristic C

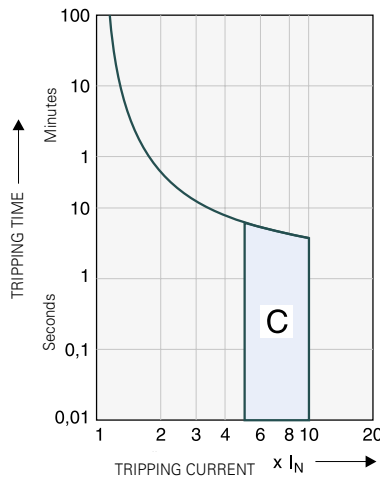


Quick-acting (B), slow (C)

Effect of the Ambient Temperature on Thermal Tripping Behaviour

Adjusted rated current values according to the ambient temperature

I_n [A]	Ambient temperature T [°C]															
	-25	-20	-10	0	10	20	30	35	40	45	50	55	60	65	70	75
6	7.3	7.2	7.0	6.7	6.5	6.3	6.0	5.9	5.8	5.7	5.6	5.4	5.3	5.2	5.1	5.0
10	12	12	12	11	11	10	10	9.9	9.7	9.5	9.3	9.0	8.9	8.7	8.5	8.3
13	16	16	15	15	14	14	13	13	13	12	12	12	12	11	11	11
16	20	19	19	18	17	17	16	16	15	15	15	14	14	14	14	13
20	24	24	23	22	22	21	20	20	19	19	19	18	18	17	17	17
25	31	30	29	28	27	26	25	25	24	24	23	23	22	22	21	21
32	39	38	37	36	35	33	32	32	31	30	30	29	28	28	27	26
40	49	48	47	45	43	42	40	39	39	38	37	36	35	35	34	33
50	61	60	58	56	54	52	50	49	48	47	46	45	44	43	42	41
63	77	76	73	71	68	66	63	62	61	60	58	57	56	55	53	52


Load Capacity of Series Connected Miniature Circuit Breakers

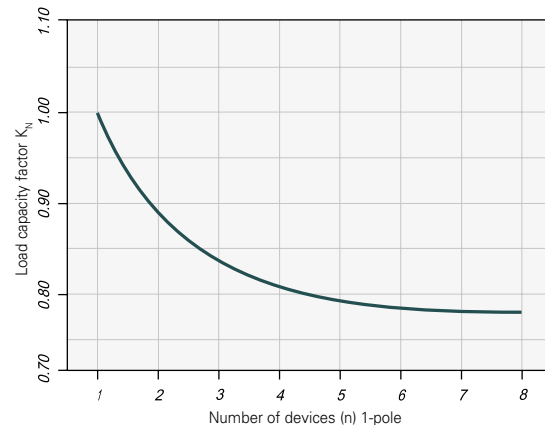

Short Circuit Selectivity HL towards DII-DIV fuse link

In case of short circuit, there is selectivity between the miniature circuit breakers HL and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{sc} under I_s only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b



Towards DII-DIV fuse link

Short circuit selectivity **Characteristic B** towards fuse link **DII-DIV***)

HL I_n [A]	DII-DIV gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.6	0.9	1.8	3.2	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
10		0.5	0.8	1.4	2.2	3.9	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
13		0.5	0.7	1.3	2.0	3.6	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
16			0.6	1.2	1.9	3.2	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
20				1.2	1.8	3.1	4.4	4.5 ²⁾	4.5 ²⁾
25				1.2	1.8	3.0	4.2	4.5 ²⁾	4.5 ²⁾
32					1.7	2.8	3.9	4.5 ²⁾	4.5 ²⁾
40						2.7	3.8	4.5 ²⁾	4.5 ²⁾
50						2.5	3.5	4.5 ²⁾	4.5 ²⁾
63							4.5 ²⁾	4.5 ²⁾	4.5 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **DII-DIV***)

HL I_n [A]	DII-DIV gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.5	0.6	1.4	2.4	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
10		<0.5 ¹⁾	0.6	1.3	2.0	3.6	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
13				1.3	1.9	3.3	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
16				1.2	1.8	3.2	4.4	4.5 ²⁾	4.5 ²⁾
20				1.2	1.8	3.1	4.1	4.5 ²⁾	4.5 ²⁾
25					1.7	2.8	3.8	4.5 ²⁾	4.5 ²⁾
32						2.7	3.7	4.5 ²⁾	4.5 ²⁾
40							3.5	4.5 ²⁾	4.5 ²⁾
50								4.5 ²⁾	4.5 ²⁾
63									4.5 ²⁾

Towards D01-D03 fuse link

Short circuit selectivity **Characteristic B** towards fuse link **D01-D03***)

HL I_n [A]	D01-D03 gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.5	0.8	1.6	3.6	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
10		0.5	0.7	1.3	2.4	3.4	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
13		<0.5 ¹⁾	0.7	1.2	2.3	3.2	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
16			0.6	1.1	2.2	2.9	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
20				1.1	2.1	2.8	4.4	4.5 ²⁾	4.5 ²⁾
25				1.1	2.0	2.7	4.2	4.5 ²⁾	4.5 ²⁾
32					2.0	2.6	4.0	4.5 ²⁾	4.5 ²⁾
40						2.5	3.8	4.5 ²⁾	4.5 ²⁾
50						2.3	3.4	4.5 ²⁾	4.5 ²⁾
63							4.5 ²⁾	4.5 ²⁾	4.5 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **D01-D03***)

HL I_n [A]	D01-D03 gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	<0.5 ¹⁾	<0.5 ¹⁾	1.2	2.7	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
10			<0.5 ¹⁾	<0.5 ¹⁾	1.2	2.3	3.1	4.5 ²⁾	4.5 ²⁾
13					1.1	2.2	3.0	4.5 ²⁾	4.5 ²⁾
16					1.1	2.1	2.8	4.4	4.5 ²⁾
20					1.0	2.0	2.6	4.0	4.5 ²⁾
25						1.9	2.5	3.8	4.5 ²⁾
32							2.5	3.7	4.5 ²⁾
40								3.5	4.5 ²⁾
50									4.5 ²⁾
63									4.5 ²⁾

Towards NH-00 fuse link

Short circuit selectivity **Characteristic B** towards fuse link **NH-00***)

HL I_n [A]	NH-00 gL/gG											
	16	20	25	32	35	40	50	63	80	100	125	160
6	<0.5 ¹⁾	<0.5 ¹⁾	0.7	1.1	1.5	2.0	3.3	4.3	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
10		<0.5 ¹⁾	0.6	0.9	1.2	1.5	2.2	2.7	4.0	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
13		<0.5 ¹⁾	0.6	0.8	1.1	1.4	2.1	2.6	3.8	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
16			0.5	0.7	1.0	1.3	1.9	2.4	3.4	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
20				0.7	1.0	1.3	1.9	2.4	3.3	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
25				0.7	1.0	1.3	1.8	2.3	3.2	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
32					0.9	1.2	1.7	2.2	3.1	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
40						2.1	3.0	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
50						1.9	2.8	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
63							4.4	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **NH-00***)

HL I_n [A]	NH-00 gL/gG											
	16	20	25	32	35	40	50	63	80	100	125	160
6	<0.5 ¹⁾	<0.5 ¹⁾	0.5	0.8	1.2	1.5	2.5	3.3	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
10			0.5	0.7	1.0	1.4	2.0	2.5	3.8	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
13					1.0	1.3	1.9	2.4	3.6	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
16					1.0	1.3	1.8	2.3	3.3	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
20					1.0	1.2	1.7	2.2	3.2	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
25						1.6	2.1	3.0	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
32							2.1	2.9	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
40								2.8	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
50									4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
63										4.5 ²⁾	4.5 ²⁾	4.5 ²⁾

¹⁾ Selectivity limit current I_s under 0.5 kA

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the MCB

Darker areas: no selectivity

sg03518_r



Description

- High-quality miniature circuit breakers for commercial and residential applications
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 63 A
- Tripping characteristics B, C
- Rated breaking capacity 4.5 kA according to IEC/EN 60898-1

Rated current I_n (A)	Type Designation	Article No.	Units per package
----------------------------	---------------------	-------------	----------------------

4.5 kA, Characteristic B

sg02818_r



1-pole

6	HL-B6/1-HX	194918	12/120
10	HL-B10/1-HX	194919	12/120
13	HL-B13/1-HX	194920	12/120
16	HL-B16/1-HX	194921	12/120
20	HL-B20/1-HX	194922	12/120
25	HL-B25/1-HX	194923	12/120
32	HL-B32/1-HX	194924	12/120
40	HL-B40/1-HX	194925	12/120
50	HL-B50/1-HX	194926	12/120
63	HL-B63/1-HX	194927	12/120

sg03218_r



1+N-pole

6	HL-B6/1N-HX	194938	6/60
10	HL-B10/1N-HX	194939	6/60
13	HL-B13/1N-HX	194940	6/60
16	HL-B16/1N-HX	194941	6/60
20	HL-B20/1N-HX	194942	6/60
25	HL-B25/1N-HX	194943	6/60
32	HL-B32/1N-HX	194944	6/60
40	HL-B40/1N-HX	194945	6/60
50	HL-B50/1N-HX	194946	6/60
63	HL-B63/1N-HX	194947	6/60

sg03018_r



2-pole

6	HL-B6/2-HX	194958	6/60
10	HL-B10/2-HX	194959	6/60
13	HL-B13/2-HX	194960	6/60
16	HL-B16/2-HX	194961	6/60
20	HL-B20/2-HX	194962	6/60
25	HL-B25/2-HX	194963	6/60
32	HL-B32/2-HX	194964	6/60
40	HL-B40/2-HX	194965	6/60
50	HL-B50/2-HX	194966	6/60
63	HL-B63/2-HX	194967	6/60

sg03318_r



3-pole

6	HL-B6/3-HX	194978	4/40
10	HL-B10/3-HX	194979	4/40
13	HL-B13/3-HX	194980	4/40
16	HL-B16/3-HX	194981	4/40
20	HL-B20/3-HX	194982	4/40
25	HL-B25/3-HX	194983	4/40
32	HL-B32/3-HX	194984	4/40
40	HL-B40/3-HX	194985	4/40
50	HL-B50/3-HX	194986	4/40
63	HL-B63/3-HX	194987	4/40

sg03518_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
3+N-pole			
6	HL-B6/3N-HX	194998	3/30
10	HL-B10/3N-HX	194999	3/30
13	HL-B13/3N-HX	195000	3/30
16	HL-B16/3N-HX	195001	3/30
20	HL-B20/3N-HX	195002	3/30
25	HL-B25/3N-HX	195003	3/30
32	HL-B32/3N-HX	195004	3/30
40	HL-B40/3N-HX	195005	3/30
50	HL-B50/3N-HX	195006	3/30
63	HL-B63/3N-HX	195007	3/30

4.5 kA, Characteristic C

sg02818_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
1-pole			
6	HL-C6/1-HX	194928	12/120
10	HL-C10/1-HX	194929	12/120
13	HL-C13/1-HX	194930	12/120
16	HL-C16/1-HX	194931	12/120
20	HL-C20/1-HX	194932	12/120
25	HL-C25/1-HX	194933	12/120
32	HL-C32/1-HX	194934	12/120
40	HL-C40/1-HX	194935	12/120
50	HL-C50/1-HX	194936	12/120
63	HL-C63/1-HX	194937	12/120

sg03218_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
1+N-pole			
6	HL-C6/1N-HX	194948	6/60
10	HL-C10/1N-HX	194949	6/60
13	HL-C13/1N-HX	194950	6/60
16	HL-C16/1N-HX	194951	6/60
20	HL-C20/1N-HX	194952	6/60
25	HL-C25/1N-HX	194953	6/60
32	HL-C32/1N-HX	194954	6/60
40	HL-C40/1N-HX	194955	6/60
50	HL-C50/1N-HX	194956	6/60
63	HL-C63/1N-HX	194957	6/60

sg03018_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
2-pole			
6	HL-C6/2-HX	194968	6/60
10	HL-C10/2-HX	194969	6/60
13	HL-C13/2-HX	194970	6/60
16	HL-C16/2-HX	194971	6/60
20	HL-C20/2-HX	194972	6/60
25	HL-C25/2-HX	194973	6/60
32	HL-C32/2-HX	194974	6/60
40	HL-C40/2-HX	194975	6/60
50	HL-C50/2-HX	194976	6/60
63	HL-C63/2-HX	194977	6/60

sg03318_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
3-pole			
6	HL-C6/3-HX	194988	4/40
10	HL-C10/3-HX	194989	4/40
13	HL-C13/3-HX	194990	4/40
16	HL-C16/3-HX	194991	4/40
20	HL-C20/3-HX	194992	4/40
25	HL-C25/3-HX	194993	4/40
32	HL-C32/3-HX	194994	4/40
40	HL-C40/3-HX	194995	4/40
50	HL-C50/3-HX	194996	4/40
63	HL-C63/3-HX	194997	4/40

sg03518_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
3+N-pole			
6	HL-C6/3N-HX	195008	3/30
10	HL-C10/3N-HX	195009	3/30
13	HL-C13/3N-HX	195010	3/30
16	HL-C16/3N-HX	195011	3/30
20	HL-C20/3N-HX	195012	3/30
25	HL-C25/3N-HX	195013	3/30
32	HL-C32/3N-HX	195014	3/30
40	HL-C40/3N-HX	195015	3/30
50	HL-C50/3N-HX	195016	3/30
63	HL-C63/3N-HX	195017	3/30

Specifications | Miniature Circuit Breakers HL-HX

Description

- High selectivity between and back-up fuse due to low let-through energy
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Meets the requirements of insulation co-ordination, distance between contacts ≥ 4 mm, for secure isolation
- Suitable for applications up to 48 V DC


Accessories:

Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Remote control and automatic switching device	Z-FW/LP	248296
Shunt trip release	ZP-ASA/..	248438, 248439
Undervoltage release	Z-USA/..	248288-248291
Compact enclosure	KLV-TC-2	276240
	KLV-TC-4	276241
Additional terminal 35 mm ²	Z-HA-EK/35	263960
Switching interlock	Z-IS/SPE-1TE	274418


Technical Data

		HL-HX
Electrical		
Design according to		IEC/EN 60898-1
Current test marks as printed onto the device		
Rated voltage	U_n	AC: 230/400 V DC: 48 V (per pole, max. 2 poles)
Rated frequency		50/60 Hz
Rated breaking capacity according to IEC/EN 60898-1	I_{cn}	4.5 kA
Characteristic		B, C
Back-up fuse		max. 100 A gL
Selectivity class		3
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50 μ s)
Endurance		
electrical components		$\geq 10,000$ switching operations
mechanical components		$\geq 20,000$ switching operations
Line voltage connection		at will (above/below)
Minimal voltage		12 V AC/DC
Mechanical		
Frame size		45 mm
Device height		80 mm
Device width		17.5 mm per pole (1MU)
Mounting		quick fastening with 3 lock-in positions on DIN rail IEC/EN 60715
Degree of protection		IP20
Upper and lower terminals		open mouthed/lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		1-25 mm ²
Terminal torque		2-2.4 Nm
Busbar thickness		0.8 - 2 mm
Mounting		independent of position
Climatic conditions		Acc. to IEC 68-2 (25...55°C / 90...95% RH)

Connection diagrams




Dimensions (mm)

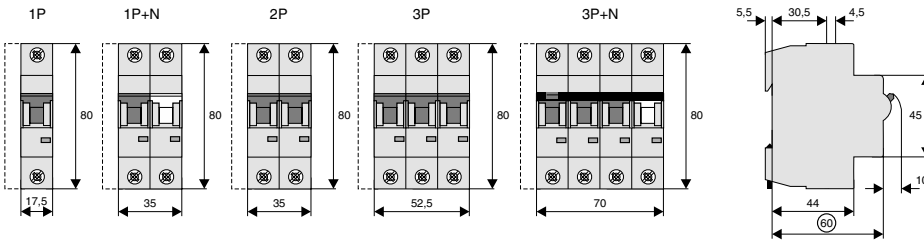


Tripping Characteristics (IEC/EN 60898-1)

Tripping characteristic B

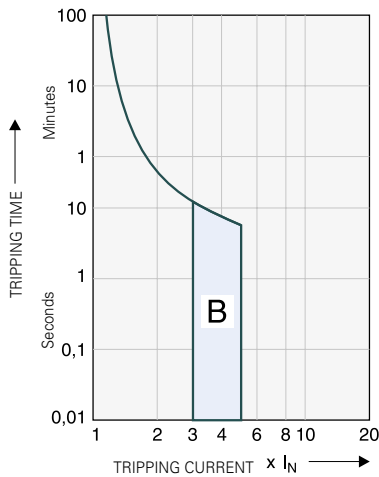

Tripping characteristic C

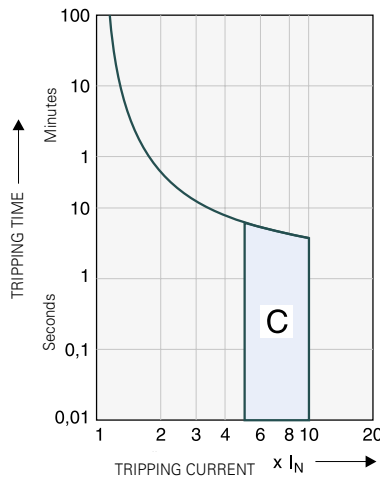


Quick-acting (B), slow (C)

Effect of the Ambient Temperature on Thermal Tripping Behaviour

Adjusted rated current values according to the ambient temperature

I _n [A]	Ambient temperature T [°C]															
	-25	-20	-10	0	10	20	30	35	40	45	50	55	60	65	70	75
6	7.3	7.2	7.0	6.7	6.5	6.3	6.0	5.9	5.8	5.7	5.6	5.4	5.3	5.2	5.1	5.0
10	12	12	12	11	11	10	10	9.9	9.7	9.5	9.3	9.0	8.9	8.7	8.5	8.3
13	16	16	15	15	14	14	13	13	13	12	12	12	12	11	11	11
16	20	19	19	18	17	17	16	16	15	15	15	14	14	14	14	13
20	24	24	23	22	22	21	20	20	19	19	19	18	18	17	17	17
25	31	30	29	28	27	26	25	25	24	24	23	23	22	22	21	21
32	39	38	37	36	35	33	32	32	31	30	30	29	28	28	27	26
40	49	48	47	45	43	42	40	39	39	38	37	36	35	35	34	33
50	61	60	58	56	54	52	50	49	48	47	46	45	44	43	42	41
63	77	76	73	71	68	66	63	62	61	60	58	57	56	55	53	52

Load Capacity of Series Connected Miniature Circuit Breakers

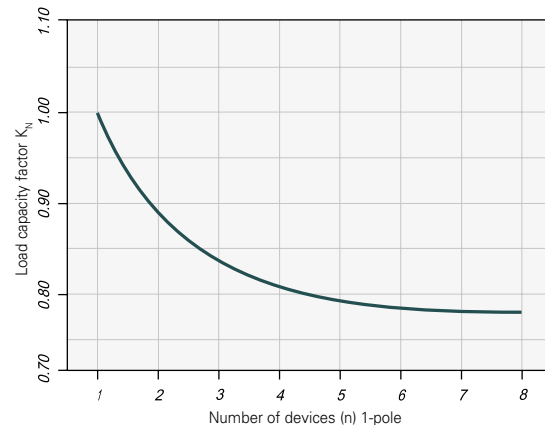


Effect of Power Frequency

Effect of power frequency on the tripping behaviour I_{MA} of the quick release


	Power frequency f [Hz]						
	16 ^{2/3}	50	60	100	200	300	400
$I_{MA}(f)/I_{MA}(50 \text{ Hz})$ [%]	91	100	101	106	115	134	141

Let-through Energy HL-HX

Let-through Energy HL-HX, Characteristic B, 1-pole

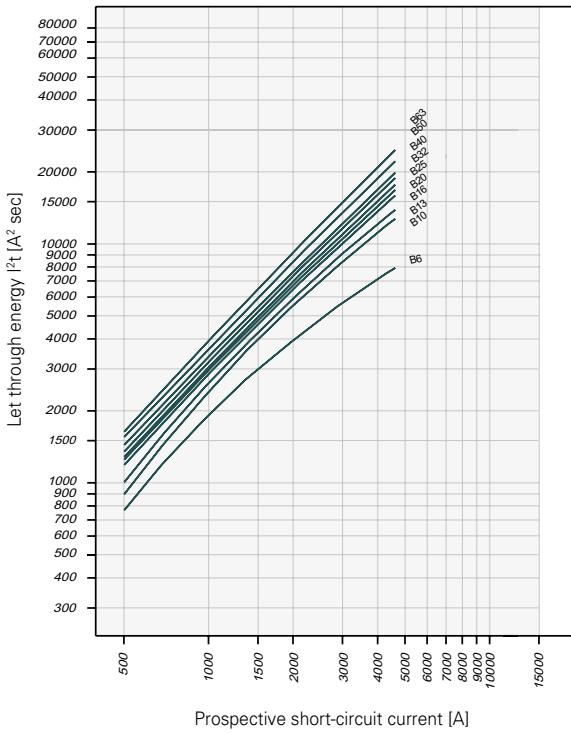


Let-through Energy HL-HX, Characteristic C, 1-pole

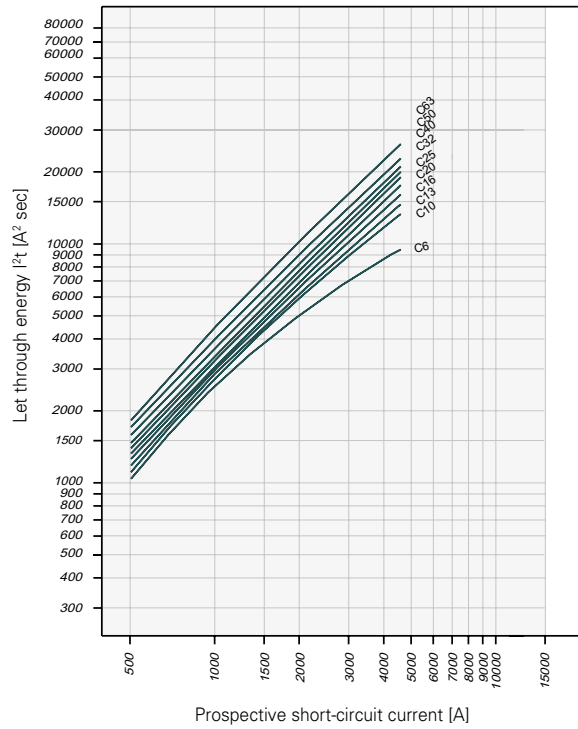

Short Circuit Selectivity HL-HX towards DII-DIV fuse link

In case of short circuit, there is selectivity between the miniature circuit breakers HL-HX and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{ks} under I_s only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b



Towards DII-DIV fuse link

Short circuit selectivity **Characteristic B** towards fuse link **DII-DIV***)

HL-HX	DII-DIV gL/gG								
I_n [A]	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.6	0.9	1.8	3.2	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
10		0.5	0.8	1.4	2.2	3.9	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
13		0.5	0.7	1.3	2.0	3.6	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
16			0.6	1.2	1.9	3.2	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
20				1.2	1.8	3.1	4.4	4.5 ²⁾	4.5 ²⁾
25				1.2	1.8	3.0	4.2	4.5 ²⁾	4.5 ²⁾
32					1.7	2.8	3.9	4.5 ²⁾	4.5 ²⁾
40						2.7	3.8	4.5 ²⁾	4.5 ²⁾
50						2.5	3.5	4.5 ²⁾	4.5 ²⁾
63								4.5 ²⁾	4.5 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **DII-DIV***)

HL-HX	DII-DIV gL/gG									
I_n [A]	10	16	20	25	35	50	63	80	100	
6	<0.5 ¹⁾	0.5	0.6	1.4	2.4	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	
10		<0.5 ¹⁾	0.6	1.3	2.0	3.6	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	
13				1.3	1.9	3.3	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	
16				1.2	1.8	3.2	4.4	4.5 ²⁾	4.5 ²⁾	
20				1.2	1.8	3.1	4.1	4.5 ²⁾	4.5 ²⁾	
25					1.7	2.8	3.8	4.5 ²⁾	4.5 ²⁾	
32						2.7	3.7	4.5 ²⁾	4.5 ²⁾	
40							3.5	4.5 ²⁾	4.5 ²⁾	
50								4.5 ²⁾	4.5 ²⁾	
63									4.5 ²⁾	

Towards D01-D03 fuse link

Short circuit selectivity **Characteristic B** towards fuse link **D01-D03***)

HL-HX	D01-D03 gL/gG								
I_n [A]	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.5	0.8	1.6	3.6	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
10		0.5	0.7	1.3	2.4	3.4	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
13		<0.5 ¹⁾	0.7	1.2	2.3	3.2	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
16			0.6	1.1	2.2	2.9	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
20				1.1	2.1	2.8	4.4	4.5 ²⁾	4.5 ²⁾
25				1.1	2.0	2.7	4.2	4.5 ²⁾	4.5 ²⁾
32					2.0	2.6	4.0	4.5 ²⁾	4.5 ²⁾
40						2.5	3.8	4.5 ²⁾	4.5 ²⁾
50						2.3	3.4	4.5 ²⁾	4.5 ²⁾
63								4.5 ²⁾	4.5 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **D01-D03***)

HL-HX	D01-D03 gL/gG									
I_n [A]	10	16	20	25	35	50	63	80	100	
6	<0.5 ¹⁾	<0.5 ¹⁾	<0.5 ¹⁾	1.2	2.7	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	
10			<0.5 ¹⁾	<0.5 ¹⁾	1.2	2.3	3.1	4.5 ²⁾	4.5 ²⁾	
13					1.1	2.2	3.0	4.5 ²⁾	4.5 ²⁾	
16					1.1	2.1	2.8	4.4	4.5 ²⁾	
20					1.0	2.0	2.6	4.0	4.5 ²⁾	
25						1.9	2.5	3.8	4.5 ²⁾	
32							2.5	3.7	4.5 ²⁾	
40								3.5	4.5 ²⁾	
50									4.5 ²⁾	
63									4.5 ²⁾	

Towards NH-00 fuse link

Short circuit selectivity **Characteristic B** towards fuse link **NH-00***)

HL-HX	NH-00 gL/gG											
I_n [A]	16	20	25	32	35	40	50	63	80	100	125	160
6	<0.5 ¹⁾	<0.5 ¹⁾	0.7	1.1	1.5	2.0	3.3	4.3	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
10		<0.5 ¹⁾	0.6	0.9	1.2	1.5	2.2	2.7	4.0	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
13		<0.5 ¹⁾	0.6	0.8	1.1	1.4	2.1	2.6	3.8	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
16			0.5	0.7	1.0	1.3	1.9	2.4	3.4	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
20				0.7	1.0	1.3	1.9	2.4	3.3	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
25				0.7	1.0	1.3	1.8	2.3	3.2	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
32					0.9	1.2	1.7	2.2	3.1	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
40						2.1	3.0	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
50						1.9	2.8	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
63							4.4	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **NH-00***)

HL-HX	NH-00 gL/gG											
I_n [A]	16	20	25	32	35	40	50	63	80	100	125	160
6	<0.5 ¹⁾	<0.5 ¹⁾	0.5	0.8	1.2	1.5	2.5	3.3	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
10			0.5	0.7	1.0	1.4	2.0	2.5	3.8	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
13					1.0	1.3	1.9	2.4	3.6	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
16					1.0	1.3	1.8	2.3	3.3	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
20					1.0	1.2	1.7	2.2	3.2	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
25						1.6	2.1	3.0	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
32							2.1	2.9	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
40								2.8	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
50									4.5 ²⁾	4.5 ²⁾	4.5 ²⁾	4.5 ²⁾
63										4.5 ²⁾	4.5 ²⁾	4.5 ²⁾

¹⁾ Selectivity limit current I_s under 0.5 kA

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the MCB

Darker areas: no selectivity

sg03518_r



Description

- High-quality miniature circuit breakers for commercial and residential applications
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 63 A
- Tripping characteristics B, C
- Rated breaking capacity 6 kA according to IEC/EN 60898-1

Rated current I_n (A)	Type Designation	Article No.	Units per package
----------------------------	---------------------	-------------	----------------------

6 kA, Characteristic B

sg02918_r



1-pole

6	HN-B6/1	194818	12/120
10	HN-B10/1	194819	12/120
13	HN-B13/1	194820	12/120
16	HN-B16/1	194821	12/120
20	HN-B20/1	194822	12/120
25	HN-B25/1	194823	12/120
32	HN-B32/1	194824	12/120
40	HN-B40/1	194825	12/120
50	HN-B50/1	194826	12/120
63	HN-B63/1	194827	12/120

sg02718_r



1+N-pole

6	HN-B6/1N	194838	6/60
10	HN-B10/1N	194839	6/60
13	HN-B13/1N	194840	6/60
16	HN-B16/1N	194841	6/60
20	HN-B20/1N	194842	6/60
25	HN-B25/1N	194843	6/60
32	HN-B32/1N	194844	6/60
40	HN-B40/1N	194845	6/60
50	HN-B50/1N	194846	6/60
63	HN-B63/1N	194847	6/60

sg03118_r



2-pole

6	HN-B6/2	194858	6/60
10	HN-B10/2	194859	6/60
13	HN-B13/2	194860	6/60
16	HN-B16/2	194861	6/60
20	HN-B20/2	194862	6/60
25	HN-B25/2	194863	6/60
32	HN-B32/2	194864	6/60
40	HN-B40/2	194865	6/60
50	HN-B50/2	194866	6/60
63	HN-B63/2	194867	6/60

sg03418_r



3-pole

6	HN-B6/3	194878	4/40
10	HN-B10/3	194879	4/40
13	HN-B13/3	194880	4/40
16	HN-B16/3	194881	4/40
20	HN-B20/3	194882	4/40
25	HN-B25/3	194883	4/40
32	HN-B32/3	194884	4/40
40	HN-B40/3	194885	4/40
50	HN-B50/3	194886	4/40
63	HN-B63/3	194887	4/40

sg03618_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
3+N-pole			
6	HN-B6/3N	194898	3/30
10	HN-B10/3N	194899	3/30
13	HN-B13/3N	194900	3/30
16	HN-B16/3N	194901	3/30
20	HN-B20/3N	194902	3/30
25	HN-B25/3N	194903	3/30
32	HN-B32/3N	194904	3/30
40	HN-B40/3N	194905	3/30
50	HN-B50/3N	194906	3/30
63	HN-B63/3N	194907	3/30

sg02918_r



6 kA, Characteristic C			
1-pole			
6	HN-C6/1	194828	12/120
10	HN-C10/1	194829	12/120
13	HN-C13/1	194830	12/120
16	HN-C16/1	194831	12/120
20	HN-C20/1	194832	12/120
25	HN-C25/1	194833	12/120
32	HN-C32/1	194834	12/120
40	HN-C40/1	194835	12/120
50	HN-C50/1	194836	12/120
63	HN-C63/1	194837	12/120

sg02718_r



1+N-pole			
6	HN-C6/1N	194848	6/60
10	HN-C10/1N	194849	6/60
13	HN-C13/1N	194850	6/60
16	HN-C16/1N	194851	6/60
20	HN-C20/1N	194852	6/60
25	HN-C25/1N	194853	6/60
32	HN-C32/1N	194854	6/60
40	HN-C40/1N	194855	6/60
50	HN-C50/1N	194856	6/60
63	HN-C63/1N	194857	6/60

sg03118_r



2-pole			
6	HN-C6/2	194868	6/60
10	HN-C10/2	194869	6/60
13	HN-C13/2	194870	6/60
16	HN-C16/2	194871	6/60
20	HN-C20/2	194872	6/60
25	HN-C25/2	194873	6/60
32	HN-C32/2	194874	6/60
40	HN-C40/2	194875	6/60
50	HN-C50/2	194876	6/60
63	HN-C63/2	194877	6/60

1.46

Protective Devices

xPole Home

Miniature Circuit Breakers HN xPole Home

sg03418_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
3-pole			
6	HN-C6/3	194888	4/40
10	HN-C10/3	194889	4/40
13	HN-C13/3	194890	4/40
16	HN-C16/3	194891	4/40
20	HN-C20/3	194892	4/40
25	HN-C25/3	194893	4/40
32	HN-C32/3	194894	4/40
40	HN-C40/3	194895	4/40
50	HN-C50/3	194896	4/40
63	HN-C63/3	194897	4/40

sg03618_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
3+N-pole			
6	HN-C6/3N	194908	3/30
10	HN-C10/3N	194909	3/30
13	HN-C13/3N	194910	3/30
16	HN-C16/3N	194911	3/30
20	HN-C20/3N	194912	3/30
25	HN-C25/3N	194913	3/30
32	HN-C32/3N	194914	3/30
40	HN-C40/3N	194915	3/30
50	HN-C50/3N	194916	3/30
63	HN-C63/3N	194917	3/30

Specifications | Miniature Circuit Breakers HN

Description

- High selectivity between MCB and back-up fuse due to low let-through energy
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Meets the requirements of insulation co-ordination, distance between contacts ≥ 4 mm, for secure isolation
- Suitable for applications up to 48 V DC


Accessories:

Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Remote control and automatic switching device	Z-FW/LP	248296
Shunt trip release	ZP-ASA/..	248438, 248439
Undervoltage release	Z-USA/..	248288-248291
Compact enclosure	KLV-TC-2	276240
	KLV-TC-4	276241
Additional terminal 35 mm ²	Z-HA-EK/35	263960
Switching interlock	Z-IS/SPE-1TE	274418


Technical Data

		HN
Electrical		
Design according to		IEC/EN 60898-1
Current test marks as printed onto the device		
Rated voltage	U_n	AC: 230/400 V DC: 48 V (per pole, max. 2 poles)
Rated frequency		50/60 Hz
Rated breaking capacity according to IEC/EN 60898-1	I_{cn}	6 kA
Characteristic		B, C
Back-up fuse		max. 100 A gL
Selectivity class		3
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50 μ s)
Endurance		
electrical components		$\geq 10,000$ switching operations
mechanical components		$\geq 20,000$ switching operations
Line voltage connection		at will (above/below)
Minimal voltage		12 V AC/DC
Mechanical		
Frame size		45 mm
Device height		80 mm
Device width		17.5 mm per pole (1MU)
Mounting		quick fastening with 3 lock-in positions on DIN rail IEC/EN 60715
Degree of protection		IP20
Upper and lower terminals		open mouthed/lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		1-25 mm ²
Terminal torque		2-2.4 Nm
Busbar thickness		0.8 - 2 mm
Mounting		independent of position
Climatic conditions		Acc. to IEC 68-2 (25...55°C / 90...95% RH)

Connection diagrams




Dimensions (mm)

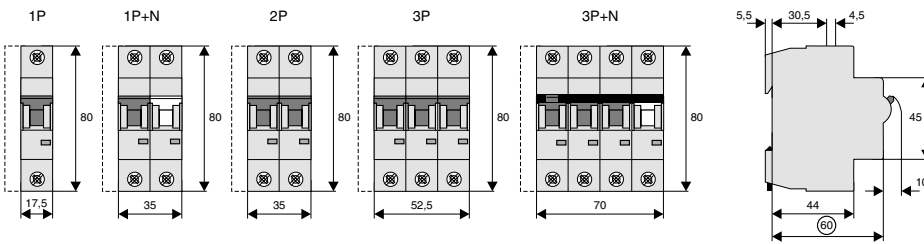


Tripping Characteristics (IEC/EN 60898-1)

Tripping characteristic B

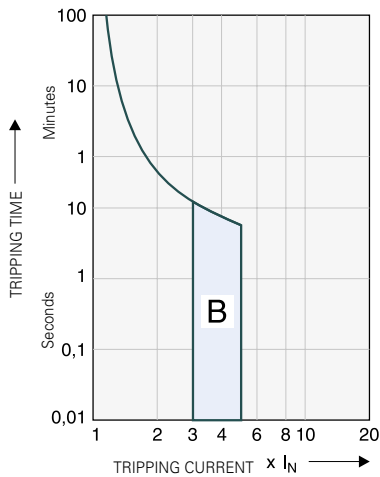

Tripping characteristic C

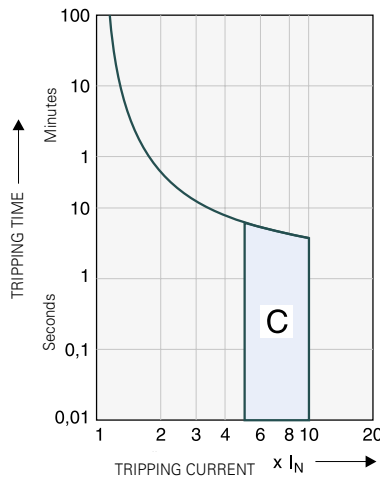


Quick-acting (B), slow (C)

Effect of the Ambient Temperature on Thermal Tripping Behaviour

Adjusted rated current values according to the ambient temperature

I _n [A]	Ambient temperature T [°C]															
	-25	-20	-10	0	10	20	30	35	40	45	50	55	60	65	70	75
6	7.3	7.2	7.0	6.7	6.5	6.3	6.0	5.9	5.8	5.7	5.6	5.4	5.3	5.2	5.1	5.0
10	12	12	12	11	11	10	10	9.9	9.7	9.5	9.3	9.0	8.9	8.7	8.5	8.3
13	16	16	15	15	14	14	13	13	13	12	12	12	12	11	11	11
16	20	19	19	18	17	17	16	16	15	15	15	14	14	14	14	13
20	24	24	23	22	22	21	20	20	19	19	19	18	18	17	17	17
25	31	30	29	28	27	26	25	25	24	24	23	23	22	22	21	21
32	39	38	37	36	35	33	32	32	31	30	30	29	28	28	27	26
40	49	48	47	45	43	42	40	39	39	38	37	36	35	35	34	33
50	61	60	58	56	54	52	50	49	48	47	46	45	44	43	42	41
63	77	76	73	71	68	66	63	62	61	60	58	57	56	55	53	52

Load Capacity of Series Connected Miniature Circuit Breakers

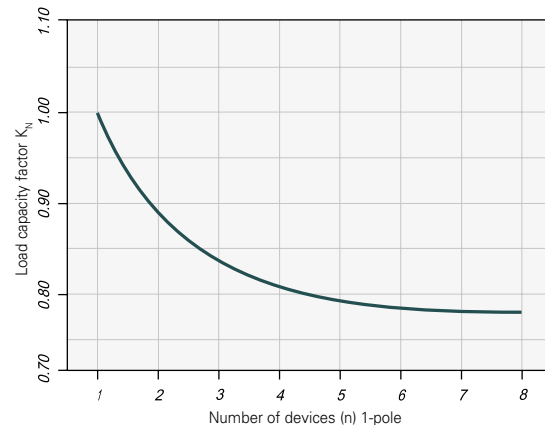


Effect of Power Frequency

Effect of power frequency on the tripping behaviour I_{MA} of the quick release


	Power frequency f [Hz]						
	16 ² / ₃	50	60	100	200	300	400
$I_{MA}(f)/I_{MA}(50 \text{ Hz})$ [%]	91	100	101	106	115	134	141

Let-through Energy HN

Let-through Energy HN, Characteristic B, 1-pole

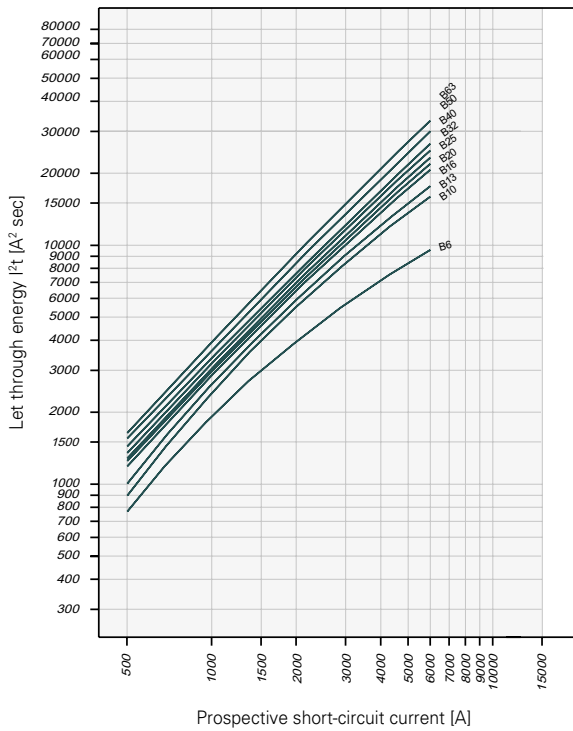


Let-through Energy HN, Characteristic C, 1-pole

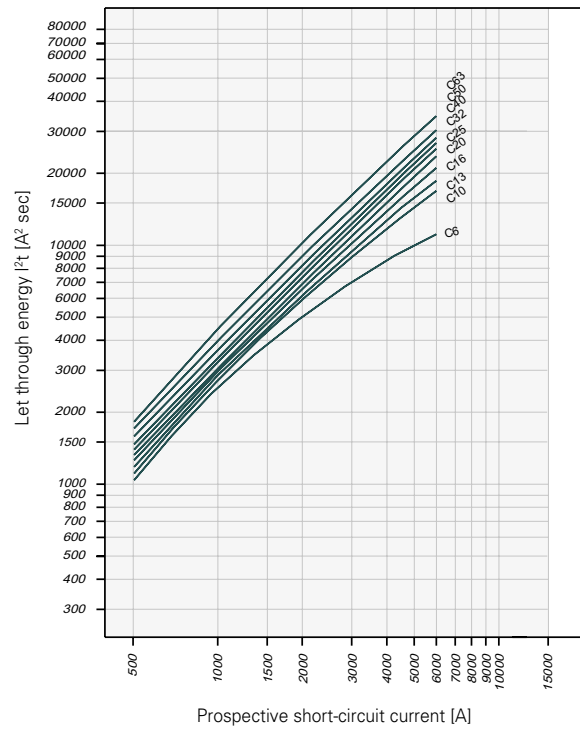

Short Circuit Selectivity HN towards DII-DIV fuse link

In case of short circuit, there is selectivity between the miniature circuit breakers HN and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{sc} under I_s only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b



Towards DII-DIV fuse link

Short circuit selectivity **Characteristic B** towards fuse link **DII-DIV***)

HN I_n [A]	DII-DIV gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.6	0.9	1.8	3.2	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10		0.5	0.8	1.4	2.2	3.9	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
13		0.5	0.7	1.3	2.0	3.6	5.4	6.0 ²⁾	
16			0.6	1.2	1.9	3.2	4.6	6.0 ²⁾	
20				1.2	1.8	3.1	4.4	6.0 ²⁾	
25				1.2	1.8	3.0	4.2	6.0 ²⁾	
32					1.7	2.8	3.9	6.0 ²⁾	
40						2.7	3.8	6.0 ²⁾	
50							2.5	3.5	5.7
63									5.3

Short circuit selectivity **Characteristic C** towards fuse link **DII-DIV***)

HN I_n [A]	DII-DIV gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.5	0.6	1.4	2.4	5.5	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10		<0.5 ¹⁾	0.6	1.3	2.0	3.6	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
13				1.3	1.9	3.3	5.0	6.0 ²⁾	
16				1.2	1.8	3.2	4.4	6.0 ²⁾	
20				1.2	1.8	3.1	4.1	6.0 ²⁾	
25					1.7	2.8	3.8	6.0 ²⁾	
32						2.7	3.7	6.0 ²⁾	
40							3.5	5.9	
50									5.5

Towards D01-D03 fuse link

Short circuit selectivity **Characteristic B** towards fuse link **D01-D03***)

HN I_n [A]	D01-D03 gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	0.5	0.8	1.6	3.6	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10		0.5	0.7	1.3	2.4	3.4	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
13		<0.5 ¹⁾	0.7	1.2	2.3	3.2	5.3	6.0 ²⁾	
16			0.6	1.1	2.2	2.9	4.6	6.0 ²⁾	
20				1.1	2.1	2.8	4.4	6.0 ²⁾	
25					1.1	2.0	2.7	4.2	6.0 ²⁾
32						2.0	2.6	4.0	6.0 ²⁾
40							2.5	3.8	6.0 ²⁾
50							2.3	3.4	6.0 ²⁾
63									6.0 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **D01-D03***)

HN I_n [A]	D01-D03 gL/gG								
	10	16	20	25	35	50	63	80	100
6	<0.5 ¹⁾	<0.5 ¹⁾	<0.5 ¹⁾	1.2	2.7	4.5	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10			<0.5 ¹⁾	<0.5 ¹⁾	1.2	2.3	3.1	5.4	6.0 ²⁾
13					1.1	2.2	3.0	4.9	6.0 ²⁾
16					1.1	2.1	2.8	4.4	6.0 ²⁾
20					1.0	2.0	2.6	4.0	6.0 ²⁾
25						1.9	2.5	3.8	6.0 ²⁾
32							2.5	3.7	6.0 ²⁾
40								3.5	6.0 ²⁾
50									6.0 ²⁾

Towards NH-00 fuse link

Short circuit selectivity **Characteristic B** towards fuse link **NH-00***)

HN I_n [A]	NH-00 gL/gG											
	16	20	25	32	35	40	50	63	80	100	125	160
6	<0.5 ¹⁾	<0.5 ¹⁾	0.7	1.1	1.5	2.0	3.3	4.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10		<0.5 ¹⁾	0.6	0.9	1.2	1.5	2.2	2.7	4.0	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
13		<0.5 ¹⁾	0.6	0.8	1.1	1.4	2.1	2.6	3.8	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
16			0.5	0.7	1.0	1.3	1.9	2.4	3.4	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
20				0.7	1.0	1.3	1.9	2.4	3.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
25				0.7	1.0	1.3	1.8	2.3	3.2	5.7	6.0 ²⁾	6.0 ²⁾
32					0.9	1.2	1.7	2.2	3.1	5.4	6.0 ²⁾	6.0 ²⁾
40								2.1	3.0	5.1	6.0 ²⁾	6.0 ²⁾
50									1.9	2.8	4.7	6.0 ²⁾
63										4.4	6.0 ²⁾	6.0 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **NH-00***)

HN I_n [A]	NH-00 gL/gG											
	16	20	25	32	35	40	50	63	80	100	125	160
6	<0.5 ¹⁾	<0.5 ¹⁾	0.5	0.8	1.2	1.5	2.5	3.3	5.7	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
10			0.5	0.7	1.0	1.4	2.0	2.5	3.8	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
13					1.0	1.3	1.9	2.4	3.6	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
16					1.0	1.3	1.8	2.3	3.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
20					1.0	1.2	1.7	2.2	3.2	5.5	6.0 ²⁾	6.0 ²⁾
25						1.6	2.1	3.0	5.2	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
32							2.1	2.9	5.0	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
40								2.8	4.8	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
50									4.5	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾
63											5.9	6.0 ²⁾

¹⁾ Selectivity limit current I_s under 0.5 kA

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the MCB

Darker areas: no selectivity

sg03518_r



Description

- High-quality miniature circuit breakers for commercial and residential applications
- Guide for secure terminal connection
- 3-position DIN rail clip, permits removal from existing busbar system
- Comprehensive range of accessories suitable for subsequent installation
- Rated currents up to 63 A
- Tripping characteristics B, C
- Rated breaking capacity 6 kA according to IEC/EN 60898-1

Rated current I_n (A)	Type Designation	Article No.	Units per package
----------------------------	---------------------	-------------	----------------------

6 kA, Characteristic B

sg02918_r



1-pole

6	HN-B6/1-HX	195018	12/120
10	HN-B10/1-HX	195019	12/120
13	HN-B13/1-HX	195020	12/120
16	HN-B16/1-HX	195021	12/120
20	HN-B20/1-HX	195022	12/120
25	HN-B25/1-HX	195023	12/120
32	HN-B32/1-HX	195024	12/120
40	HN-B40/1-HX	195025	12/120
50	HN-B50/1-HX	195026	12/120
63	HN-B63/1-HX	195027	12/120

sg02718_r



1+N-pole

6	HN-B6/1N-HX	195038	6/60
10	HN-B10/1N-HX	195039	6/60
13	HN-B13/1N-HX	195040	6/60
16	HN-B16/1N-HX	195041	6/60
20	HN-B20/1N-HX	195042	6/60
25	HN-B25/1N-HX	195043	6/60
32	HN-B32/1N-HX	195044	6/60
40	HN-B40/1N-HX	195045	6/60
50	HN-B50/1N-HX	195046	6/60
63	HN-B63/1N-HX	195047	6/60

sg03118_r



2-pole

6	HN-B6/2-HX	195058	6/60
10	HN-B10/2-HX	195059	6/60
13	HN-B13/2-HX	195060	6/60
16	HN-B16/2-HX	195061	6/60
20	HN-B20/2-HX	195062	6/60
25	HN-B25/2-HX	195063	6/60
32	HN-B32/2-HX	195064	6/60
40	HN-B40/2-HX	195065	6/60
50	HN-B50/2-HX	195066	6/60
63	HN-B63/2-HX	195067	6/60

sg03418_r



3-pole

6	HN-B6/3-HX	195078	4/40
10	HN-B10/3-HX	195079	4/40
13	HN-B13/3-HX	195080	4/40
16	HN-B16/3-HX	195081	4/40
20	HN-B20/3-HX	195082	4/40
25	HN-B25/3-HX	195083	4/40
32	HN-B32/3-HX	195084	4/40
40	HN-B40/3-HX	195085	4/40
50	HN-B50/3-HX	195086	4/40
63	HN-B63/3-HX	195087	4/40

sg03618_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
3+N-pole			
6	HN-B6/3N-HX	195098	3/30
10	HN-B10/3N-HX	195099	3/30
13	HN-B13/3N-HX	195100	3/30
16	HN-B16/3N-HX	195101	3/30
20	HN-B20/3N-HX	195102	3/30
25	HN-B25/3N-HX	195103	3/30
32	HN-B32/3N-HX	195104	3/30
40	HN-B40/3N-HX	195105	3/30
50	HN-B50/3N-HX	195106	3/30
63	HN-B63/3N-HX	195107	3/30

6 kA, Characteristic C

sg02918_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
1-pole			
6	HN-C6/1-HX	195028	12/120
10	HN-C10/1-HX	195029	12/120
13	HN-C13/1-HX	195030	12/120
16	HN-C16/1-HX	195031	12/120
20	HN-C20/1-HX	195032	12/120
25	HN-C25/1-HX	195033	12/120
32	HN-C32/1-HX	195034	12/120
40	HN-C40/1-HX	195035	12/120
50	HN-C50/1-HX	195036	12/120
63	HN-C63/1-HX	195037	12/120

sg02718_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
1+N-pole			
6	HN-C6/1N-HX	195048	6/60
10	HN-C10/1N-HX	195049	6/60
13	HN-C13/1N-HX	195050	6/60
16	HN-C16/1N-HX	195051	6/60
20	HN-C20/1N-HX	195052	6/60
25	HN-C25/1N-HX	195053	6/60
32	HN-C32/1N-HX	195054	6/60
40	HN-C40/1N-HX	195055	6/60
50	HN-C50/1N-HX	195056	6/60
63	HN-C63/1N-HX	195057	6/60

sg03118_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
2-pole			
6	HN-C6/2-HX	195068	6/60
10	HN-C10/2-HX	195069	6/60
13	HN-C13/2-HX	195070	6/60
16	HN-C16/2-HX	195071	6/60
20	HN-C20/2-HX	195072	6/60
25	HN-C25/2-HX	195073	6/60
32	HN-C32/2-HX	195074	6/60
40	HN-C40/2-HX	195075	6/60
50	HN-C50/2-HX	195076	6/60
63	HN-C63/2-HX	195077	6/60

Miniature Circuit Breakers HN-HX xPole Home

sg03418_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
3-pole			
6	HN-C6/3-HX	195088	4/40
10	HN-C10/3-HX	195089	4/40
13	HN-C13/3-HX	195090	4/40
16	HN-C16/3-HX	195091	4/40
20	HN-C20/3-HX	195092	4/40
25	HN-C25/3-HX	195093	4/40
32	HN-C32/3-HX	195094	4/40
40	HN-C40/3-HX	195095	4/40
50	HN-C50/3-HX	195096	4/40
63	HN-C63/3-HX	195097	4/40

sg03618_r



Rated current I_n (A)	Type Designation	Article No.	Units per package
3+N-pole			
6	HN-C6/3N-HX	195108	3/30
10	HN-C10/3N-HX	195109	3/30
13	HN-C13/3N-HX	195110	3/30
16	HN-C16/3N-HX	195111	3/30
20	HN-C20/3N-HX	195112	3/30
25	HN-C25/3N-HX	195113	3/30
32	HN-C32/3N-HX	195114	3/30
40	HN-C40/3N-HX	195115	3/30
50	HN-C50/3N-HX	195116	3/30
63	HN-C63/3N-HX	195117	3/30

Specifications | Miniature Circuit Breakers HN-HX

Description

- High selectivity between MCB and back-up fuse due to low let-through energy
- Compatible with standard busbar
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Meets the requirements of insulation co-ordination, distance between contacts ≥ 4 mm, for secure isolation
- Suitable for applications up to 48 V DC


Accessories:

Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Remote control and automatic switching device	Z-FW/LP	248296
Shunt trip release	ZP-ASA/..	248438, 248439
Undervoltage release	Z-USA/..	248288-248291
Compact enclosure	KLV-TC-2	276240
	KLV-TC-4	276241
Additional terminal 35 mm ²	Z-HA-EK/35	263960
Switching interlock	Z-IS/SPE-1TE	274418


Technical Data

		HN-HX
Electrical		
Design according to		IEC/EN 60898-1
Current test marks as printed onto the device		
Rated voltage	U_n	AC: 230/400 V DC: 48 V (per pole, max. 2 poles)
Rated frequency		50/60 Hz
Rated breaking capacity according to IEC/EN 60898-1	I_{cn}	6 kA
Characteristic		B, C
Back-up fuse		max. 100 A gL
Selectivity class		3
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50 μ s)
Endurance		
electrical components		$\geq 10,000$ switching operations
mechanical components		$\geq 20,000$ switching operations
Line voltage connection		at will (above/below)
Minimal voltage		12 V AC/DC
Mechanical		
Frame size		45 mm
Device height		80 mm
Device width		17.5 mm per pole (1MU)
Mounting		quick fastening with 3 lock-in positions on DIN rail IEC/EN 60715
Degree of protection		IP20
Upper and lower terminals		open mouthed/lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		1-25 mm ²
Terminal torque		2-2.4 Nm
Busbar thickness		0.8 - 2 mm
Mounting		independent of position
Climatic conditions		Acc. to IEC 68-2 (25...55°C / 90...95% RH)

Connection diagrams




Dimensions (mm)

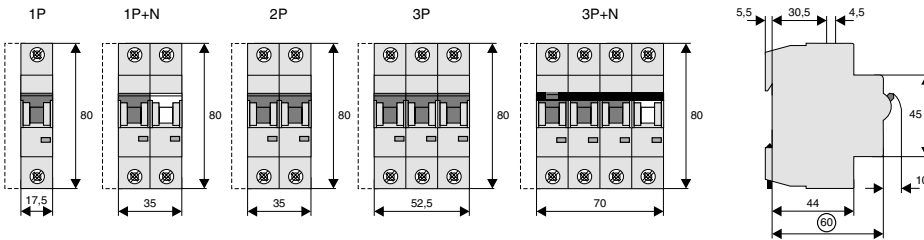


Tripping Characteristics (IEC/EN 60898-1)

Tripping characteristic B

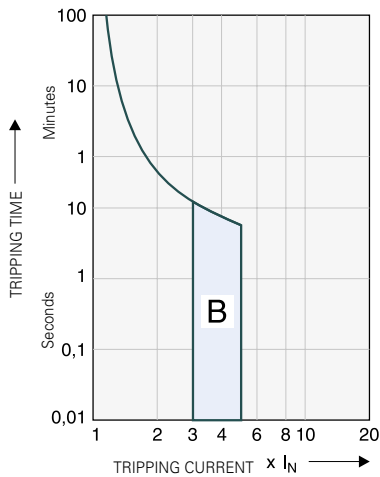

Tripping characteristic C

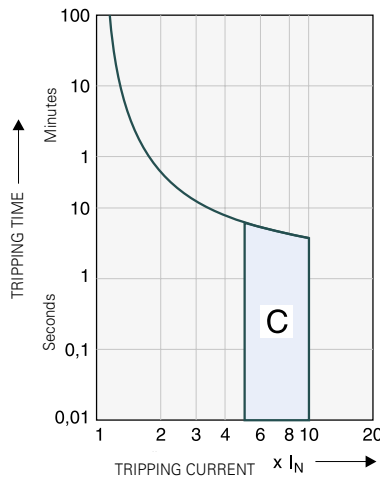


Quick-acting (B), slow (C)

Effect of the Ambient Temperature on Thermal Tripping Behaviour

Adjusted rated current values according to the ambient temperature

I _n [A]	Ambient temperature T [°C]															
	-25	-20	-10	0	10	20	30	35	40	45	50	55	60	65	70	75
6	7.3	7.2	7.0	6.7	6.5	6.3	6.0	5.9	5.8	5.7	5.6	5.4	5.3	5.2	5.1	5.0
10	12	12	12	11	11	10	10	9.9	9.7	9.5	9.3	9.0	8.9	8.7	8.5	8.3
13	16	16	15	15	14	14	13	13	13	12	12	12	12	11	11	11
16	20	19	19	18	17	17	16	16	15	15	15	14	14	14	14	13
20	24	24	23	22	22	21	20	20	19	19	19	18	18	17	17	17
25	31	30	29	28	27	26	25	25	24	24	23	23	22	22	21	21
32	39	38	37	36	35	33	32	32	31	30	30	29	28	28	27	26
40	49	48	47	45	43	42	40	39	39	38	37	36	35	35	34	33
50	61	60	58	56	54	52	50	49	48	47	46	45	44	43	42	41
63	77	76	73	71	68	66	63	62	61	60	58	57	56	55	53	52

Load Capacity of Series Connected Miniature Circuit Breakers

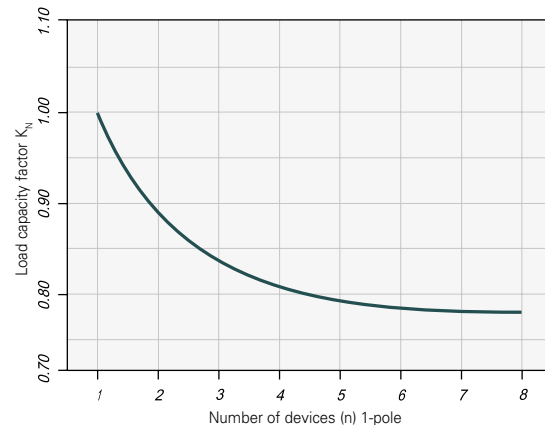


Effect of Power Frequency

Effect of power frequency on the tripping behaviour I_{MA} of the quick release


	Power frequency f [Hz]						
	16 ² / ₃	50	60	100	200	300	400
$I_{MA}(f)/I_{MA}(50 \text{ Hz})$ [%]	91	100	101	106	115	134	141

Let-through Energy HN-HX

Let-through Energy HN-HX, Characteristic B, 1-pole

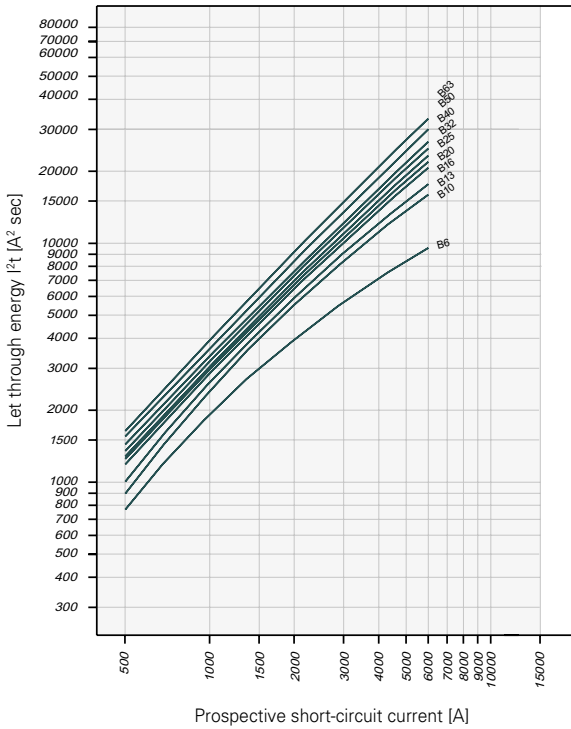


Let-through Energy HN-HX, Characteristic C, 1-pole

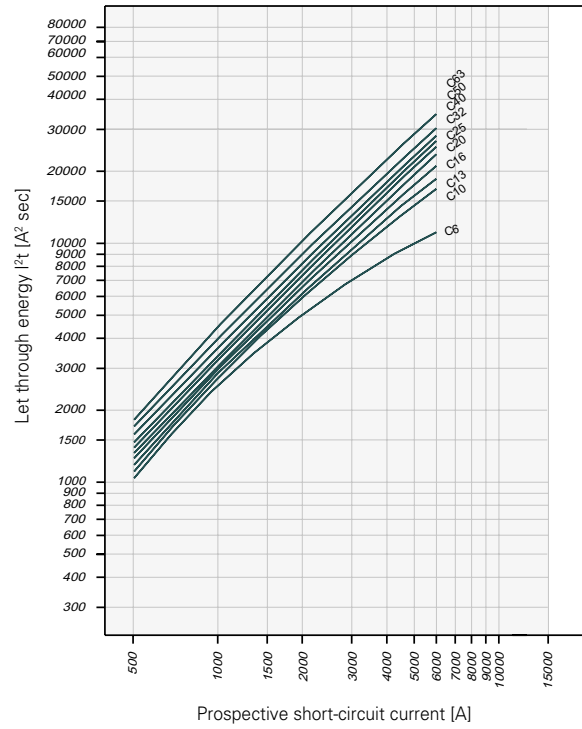

Short Circuit Selectivity HN-HX towards DII-DIV fuse link

In case of short circuit, there is selectivity between the miniature circuit breakers HN-HX and the upstream fuses up to the specified values of the selectivity limit current I_s [kA] (i. e. in case of short-circuit currents I_{ks} under I_s only the MCB will trip, in case of short circuit currents above this value both protective devices will respond).

*) basically in accordance with EN 60898-1 D.5.2.b



Towards DII-DIV fuse link

Short circuit selectivity **Characteristic B** towards fuse link **DII-DIV***)

HN-HX	DII-DIV gL/gG									
I_n [A]	10	16	20	25	35	50	63	80	100	
6		<0.5 ¹⁾	0.6	0.9	1.8	3.2	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
10			0.5	0.8	1.4	2.2	3.9	6.0 ²⁾	6.0 ²⁾	
13			0.5	0.7	1.3	2.0	3.6	5.4	6.0 ²⁾	
16				0.6	1.2	1.9	3.2	4.6	6.0 ²⁾	
20					1.2	1.8	3.1	4.4	6.0 ²⁾	
25					1.2	1.8	3.0	4.2	6.0 ²⁾	
32						1.7	2.8	3.9	6.0 ²⁾	
40							2.7	3.8	6.0 ²⁾	
50								2.5	3.5	5.7
63										5.3

Short circuit selectivity **Characteristic C** towards fuse link **DII-DIV***)

HN-HX	DII-DIV gL/gG									
I_n [A]	10	16	20	25	35	50	63	80	100	
6		<0.5 ¹⁾	0.5	0.6	1.4	2.4	5.5	6.0 ²⁾	6.0 ²⁾	
10			<0.5 ¹⁾	0.6	1.3	2.0	3.6	6.0 ²⁾	6.0 ²⁾	
13					1.3	1.9	3.3	5.0	6.0 ²⁾	
16					1.2	1.8	3.2	4.4	6.0 ²⁾	
20					1.2	1.8	3.1	4.1	6.0 ²⁾	
25						1.7	2.8	3.8	6.0 ²⁾	
32							2.7	3.7	6.0 ²⁾	
40								3.5	5.9	
50										5.5

Towards D01-D03 fuse link

Short circuit selectivity **Characteristic B** towards fuse link **D01-D03***)

HN-HX	D01-D03 gL/gG									
I_n [A]	10	16	20	25	35	50	63	80	100	
6		<0.5 ¹⁾	0.5	0.8	1.6	3.6	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
10			0.5	0.7	1.3	2.4	3.4	6.0 ²⁾	6.0 ²⁾	
13			<0.5 ¹⁾	0.7	1.2	2.3	3.2	5.3	6.0 ²⁾	
16				0.6	1.1	2.2	2.9	4.6	6.0 ²⁾	
20					1.1	2.1	2.8	4.4	6.0 ²⁾	
25					1.1	2.0	2.7	4.2	6.0 ²⁾	
32						2.0	2.6	4.0	6.0 ²⁾	
40							2.5	3.8	6.0 ²⁾	
50							2.3	3.4	6.0 ²⁾	
63										6.0 ²⁾

Short circuit selectivity **Characteristic C** towards fuse link **D01-D03***)

HN-HX	D01-D03 gL/gG									
I_n [A]	10	16	20	25	35	50	63	80	100	
6		<0.5 ¹⁾	<0.5 ¹⁾	<0.5 ¹⁾	1.2	2.7	4.5	6.0 ²⁾	6.0 ²⁾	
10			<0.5 ¹⁾	<0.5 ¹⁾	1.2	2.3	3.1	5.4	6.0 ²⁾	
13					1.1	2.2	3.0	4.9	6.0 ²⁾	
16					1.1	2.1	2.8	4.4	6.0 ²⁾	
20					1.0	2.0	2.6	4.0	6.0 ²⁾	
25						1.9	2.5	3.8	6.0 ²⁾	
32							2.5	3.7	6.0 ²⁾	
40								3.5	6.0 ²⁾	
50										6.0 ²⁾

Towards NH-00 fuse link

Short circuit selectivity **Characteristic B** towards fuse link **NH-00***)

HN-HX	NH-00 gL/gG												
I_n [A]	16	20	25	32	35	40	50	63	80	100	125	160	
6	<0.5 ¹⁾	<0.5 ¹⁾	0.7	1.1	1.5	2.0	3.3	4.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
10		<0.5 ¹⁾	0.6	0.9	1.2	1.5	2.2	2.7	4.0	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
13		<0.5 ¹⁾	0.6	0.8	1.1	1.4	2.1	2.6	3.8	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
16			0.5	0.7	1.0	1.3	1.9	2.4	3.4	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
20				0.7	1.0	1.3	1.9	2.4	3.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
25				0.7	1.0	1.3	1.8	2.3	3.2	5.7	6.0 ²⁾	6.0 ²⁾	
32					0.9	1.2	1.7	2.2	3.1	5.4	6.0 ²⁾	6.0 ²⁾	
40								2.1	3.0	5.1	6.0 ²⁾	6.0 ²⁾	
50									1.9	2.8	4.7	6.0 ²⁾	6.0 ²⁾
63										4.4	6.0 ²⁾	6.0 ²⁾	

Short circuit selectivity **Characteristic C** towards fuse link **NH-00***)

HN-HX	NH-00 gL/gG												
I_n [A]	16	20	25	32	35	40	50	63	80	100	125	160	
6	<0.5 ¹⁾	<0.5 ¹⁾	0.5	0.8	1.2	1.5	2.5	3.3	5.7	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
10			0.5	0.7	1.0	1.4	2.0	2.5	3.8	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
13					1.0	1.3	1.9	2.4	3.6	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
16					1.0	1.3	1.8	2.3	3.3	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
20					1.0	1.2	1.7	2.2	3.2	5.5	6.0 ²⁾	6.0 ²⁾	
25						1.6	2.1	3.0	5.2	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
32							2.1	2.9	5.0	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
40								2.8	4.8	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
50									4.5	6.0 ²⁾	6.0 ²⁾	6.0 ²⁾	
63											5.9	6.0 ²⁾	

¹⁾ Selectivity limit current I_s under 0.5 kA

²⁾ Selectivity limit current I_s = rated breaking capacity I_{cn} of the MCB

Darker areas: no selectivity





wa_sg03320_1





Description

- Load circuit breaker with isolating function
- Highly wear resistant contacts
- Quick make
- Terminal capacity 50 mm²
- Compatible busbars
- 1-, 2-, 3-, 4-pole

Main Load Disconnecter Switch (Isolator) HIS

	Rated Current (A)	Number of Poles	Type Designation	Article No.	Units per package
 wa_sg00920_I	20	1	HIS-20/1	167342	12/120
	20	2	HIS-20/2	167343	1/60
	20	3	HIS-20/3	167344	1/40
	20	4	HIS-20/4	167345	1/30
	25	1	HIS-25/1	167346	12/120
	25	2	HIS-25/2	167347	1/60
	25	3	HIS-25/3	167348	1/40
	25	4	HIS-25/4	167349	1/30
 wa_sg01720_I	32	1	HIS-32/1	167350	12/120
	32	2	HIS-32/2	167351	1/60
	32	3	HIS-32/3	167352	1/40
	32	4	HIS-32/4	167353	1/30
	40	1	HIS-40/1	142816	12/120
	40	2	HIS-40/2	142817	1/60
	40	3	HIS-40/3	142818	1/40
	40	4	HIS-40/4	142819	1/30
 wa_sg02520_I	63	1	HIS-63/1	142820	12/120
	63	2	HIS-63/2	142821	1/60
	63	3	HIS-63/3	142822	1/40
	63	4	HIS-63/4	142823	1/30
	80	1	HIS-80/1	142824	12/120
	80	2	HIS-80/2	142825	1/60
	80	3	HIS-80/3	142826	1/40
	80	4	HIS-80/4	142827	1/30
 wa_sg03320_I	100	1	HIS-100/1	142828	12/120
	100	2	HIS-100/2	142829	1/60
	100	3	HIS-100/3	142830	1/40
	100	4	HIS-100/4	142831	1/30
	125	1	HIS-125/1	142832	12/120
	125	2	HIS-125/2	142833	1/60
	125	3	HIS-125/3	142834	1/40
	125	4	HIS-125/4	142835	1/30

Accessories

	Description	Type Designation	Article No.	Units per package
 SG47812	PHASE OUT Switching interlock without lock for Isolators, RCDs, combined RCD/MCBs, ...	IS/SPE-1TE	101911	5/30
 sg01215	Terminal cover	Z-IS/AK-1TE	276290	10/600

Switching interlock IS/SPE-1TE

- Without lock
- Also suitable for PFIM, CF16, PKNM, CKN6

Terminal Cover Caps Z-IS/AK-1TE

- Can be sealed with leads
- Modular design, width 1 MU


Description

- Load circuit breaker with isolating function
- Design according to IEC/EN 60947-3
- Highly wear resistant contacts
- Quick make, black toggle
- Terminal capacity 50 mm²
- Compatible busbars with switchgear series Xpole by use of the mouth terminal in combination with standard fork busbar


Technical Data

	IS-20	IS-25	IS-32	IS-40	IS-63	IS-80	IS-100	IS-125
Electrical								
Design	according to IEC/EN 60947-3							
Rated voltage	240/415 V							
Frequency	50/60 Hz							
Rated insulation voltage	U_i	690 V~						
Rated impulse withstand voltage	U_{imp}	6 kV						
Pollution degree	3							
Rated short-time withstand current	I_{cw}	2 kA						
Rated short-circuit making capacity	I_{cm}	2.8 kA						
Rated current 240/415V, AC23A	20 A	25 A	32 A	40 A	63 A	80 A	100 A	125 A
Number of poles	1-, 2-, 3-, 4-poles							
Maximum back-up fuse	125 A gG							
Short circuit strength - with back-up fuse according to IEC/EN 60947-3	12.5 kA	12.5 kA	12.5 kA	12.5 kA	12.5 kA	12.5 kA	10 kA	10 kA
Endurance								
Electrical components operation cycles	≥ 3,000	≥ 3,000	≥ 3,000	≥ 3,000	≥ 3,000	≥ 3,000	≥ 3,000	≥ 2,000
Mechanical components operation cycles	≥ 16,000	≥ 16,000	≥ 16,000	≥ 16,000	≥ 16,000	≥ 16,000	≥ 16,000	≥ 14,000
Mechanical								
Frame size	45 mm							
Device height	80 mm							
Device width	17.5 mm/Pol							
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715							
Degree of protection, built-in	IP40							
Terminal protection	finger and hand touch safe according to BGV A3							
Terminals top and bottom	open mouthed/lift terminals							
Terminal capacity	2.5 - 50 mm ²							
Busbar thickness	0.8 - 2 mm							
Fastening torque of terminal screws	2.5 - 5 Nm							
Function	irrespective of the position of installation							

Connection diagram

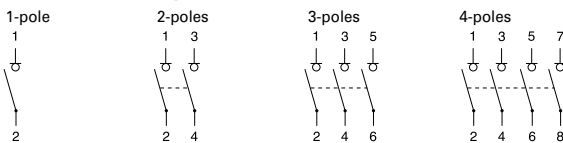

Dimensions (mm)

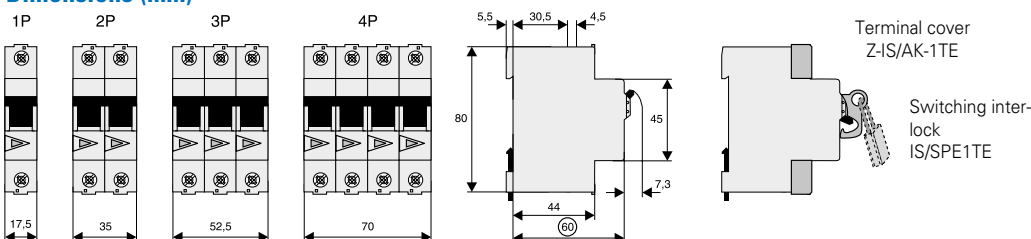

Derating table for Main Load Disconnecter Switch (Isolator) HIS above 2000m sea level

60947-3

 U_n 240/415

Above sea level (m)	Overvoltage category	Disconnect function	U_n	U_r	U_{imp}	I/I_n
m	x	x	V	V	kV	x
≤2000	III	yes	240/415	690	6	1
>2000-2500	III	yes	240/415	415	4	0.93
>2500-3000	III	yes	240/415	415	4	0.88
>3000-3500	III	yes	240/415	415	4	0.83
>3500-4000	III	yes	240/415	415	4	0.78

Eaton's electrical business is a global leader with deep regional application expertise in power distribution and circuit protection; power quality, backup power and energy storage; control and automation; life safety and security; structural solutions; and harsh and hazardous environment solutions. Through end-to-end services, channel and an integrated digital platform & insights Eaton is powering what matters across industries and around the world, helping customers solve their most critical electrical power management challenges.

For more information, visit [Eaton.com](https://www.eaton.com).



Eaton Industries (Austria) GmbH
Scheydgasse 42
1210 Vienna
Austria

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland
Eaton.eu

© 2019 Eaton
All Rights Reserved
Printed in Austria
Publication No. CA019002EN
Article number 195564-MK
June 2020
Graphics: SRA, Schrems

Changes to the products, to the information contained in this document, and to prices are reserved; as are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

